




DECADES AHEAD[®]
high power RF devices




Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



4-Way *Radial* Combiner/Divider
Model D10119

Frequency:	700 - 4200 MHz
Power:	2,000 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.35:1 Max.
Phase Balance:	± 6° Max.
Amplitude Balance:	0.3 dB Max.

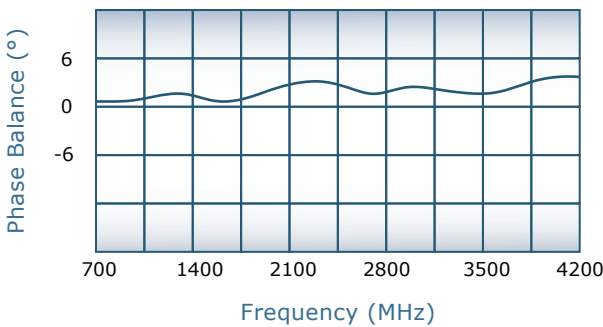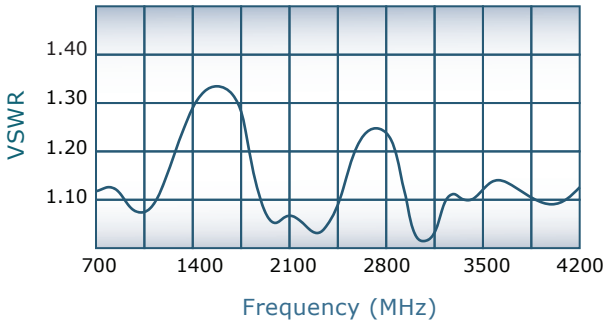
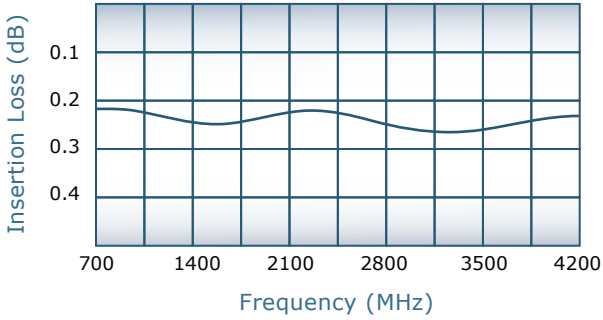


Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -40°C to +70°C
- Outer conductor assy: copper outer conductor and brass flanges (2x)

Connector Configurations

Model	J1 (Sum Port)	J2-J5 (Input/Output)
D10119-500	13/30 DIN Female	N Female

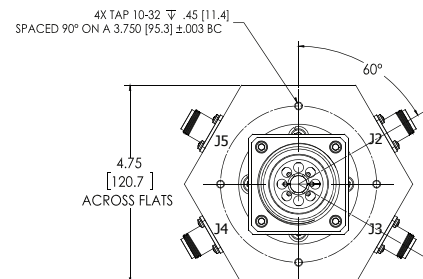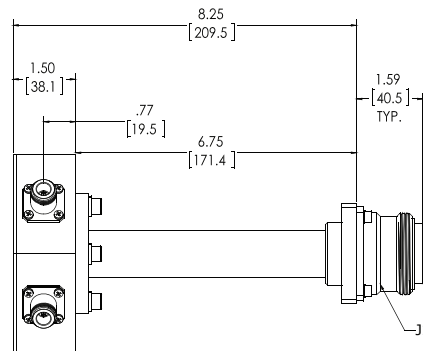

SINCE 1965

Specifications subject to change without notice



Send Us Your Specs for Custom Designs