

## PRODUCT DATA SHEET

C8692

**4-Port Dual Directional Coupler** employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

### Features:

High Power      Wide Bandwidths      Small Size      Flat Coupling      Custom Designs Available

### Electrical Specifications:

Frequency: 700 - 3000 MHz  
Power: 100 W CW  
Coupling:  $30 \pm 1.0$  dB Max.  
Flatness:  $\pm 0.5$  dB Max.  
Insertion Loss: 0.75 dB Max.  
VSWR (ML): 1.30:1 Max.  
Directivity: 15 dB Min.


### Mechanical Specifications:

Type: Connectorized  
Material: Aluminum 6061-T6  
Surface Finish: Chem. Film Per MIL-DTL-5541F  
Type I Class 3 (Yellow Iridite)  
RoHS Compliant Available  
Operating Temperature: -55°C to +75°C  
Storage Temperature: -60°C to +85°C  
Humidity: 95% Non-Condensing  
Size: 3.0 x 3.0 x 1.09"

### Connector Configurations:

| Model     | Input (J1) | Output (J2) | Fwd (J3) | Rev (J4) |
|-----------|------------|-------------|----------|----------|
| C8692-10  | N Female   | N Female    | N Female | N Female |
| C8692-12  | N Female   | N Female    | SMA      | SMA      |
| C8692-13  | N Female   | N Female    | BNC      | BNC      |
| C8692-102 | SMA        | SMA         | SMA      | SMA      |

**Werlatone®** Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.




## PRODUCT DATA SHEET


C8692

### Performance Data (Specifications subject to change without notice):


Coupling:

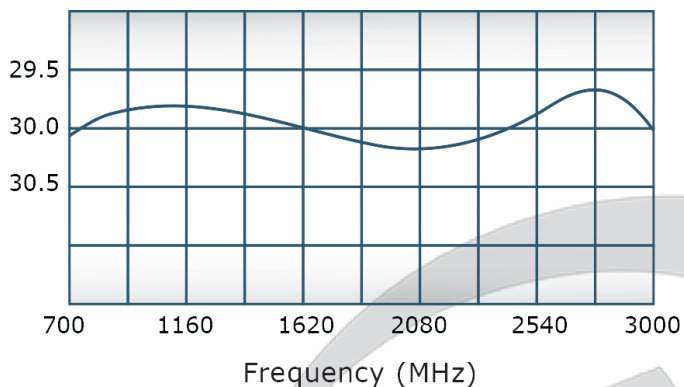


VSWR:

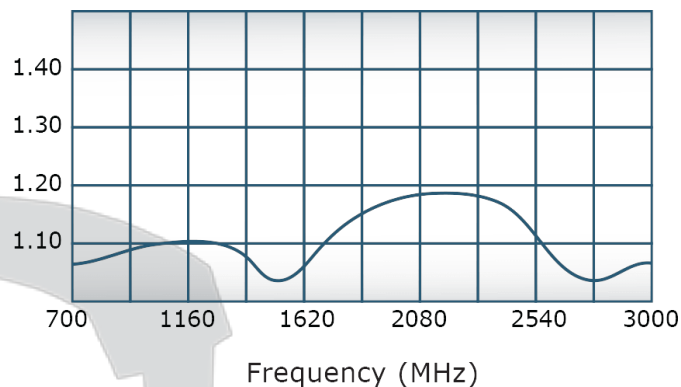

Insertion Loss:

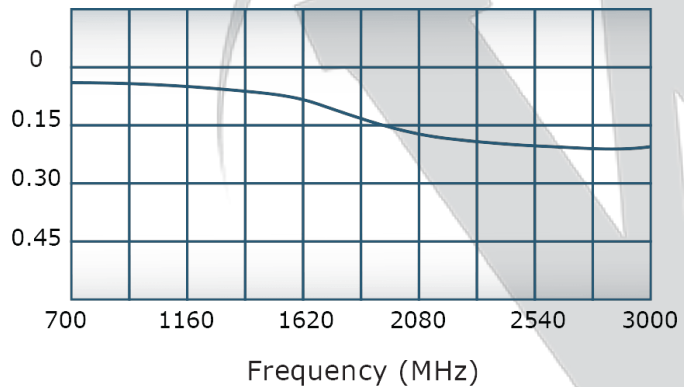

Directivity:

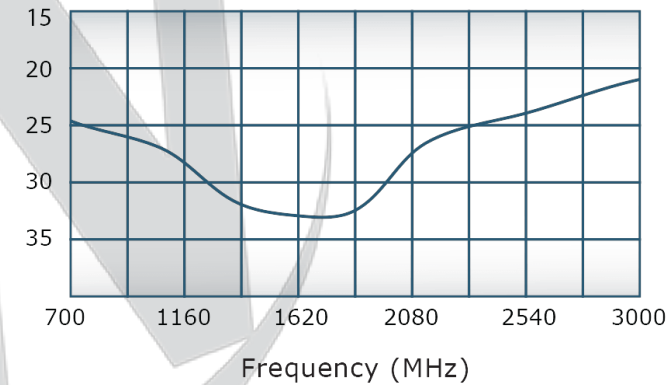

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



**RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION**  
This document contains proprietary information which is the sole property of Werlatone, Inc.



| REVISION HISTORY |                 |          |          |
|------------------|-----------------|----------|----------|
| REV.             | REVISION RECORD | DATE     | APPROVED |
| A                | ECN 9696        | 11/27/18 | RB       |

**NOTES: UNLESS OTHERWISE SPECIFIED**

1. MATERIAL: ALUMINUM 6061-T6
2. FINISH: CHEM FILM PER MIL-DTL 5541F TYPE I CLASS 3 (YELLOW IRIDITE)

|                      |             |  |          |       |          |  |   |    |              |
|----------------------|-------------|--|----------|-------|----------|--|---|----|--------------|
|                      |             | UNLESS OTHERWISE SPECIFIED   |          | OWN   | DATE     |  <b>WERLATONE® SINCE 1965</b> | 17 Jon Barrett Rd<br>Patterson, NY 12568                        |    |              |
| NEXT ASSY<br>USED ON | APPLICATION | <ul style="list-style-type: none"><li>• INTERPRET DRAWING AS PER MIL-STD-100</li><li>• DIMENSIONING PER ASME Y14.5-2009</li><li>• DIMENSIONAL INFO FOR REF ONLY</li><li>• DIMENSIONS ARE IN INCHES</li><li>• DIMENSIONAL LIMITS APPLY BEFORE PROCESSING</li><li>• TOLERANCES:<ul style="list-style-type: none"><li>ANGLES ± °</li><li>3 PL ± .005 [13]</li><li>2 PL ± .003 [18]</li></ul></li><li>• REMOVE ALL MARKS AND SHARP EDGES R.01 MAX</li><li>• CONDUCTIVITY MACHINED SUR. 402 FPM</li><li>• MACHINE TOOL, REWORKING 402 FPM</li></ul> |          | RH    | 7/5/2001 |  | <b>OUTLINE</b><br>SIZE CAGE CODE DWG NO<br><div>10379-505</div> | R1 | SHEET 1 OF 1 |
|                      |             | CHK  | DATE     | TITLE |          |  |   |    |              |
|                      |             | BNGR   | 7/5/2001 |       |          |  |   |    |              |
|                      |             |  |          | MJ    | DATE     |  |   |    |              |
|                      |             |  |          | QA    | DATE     |  |   |    |              |
|                      |             |  |          | RLSE  | DATE     |  |   |    |              |
|                      |             | THIRD ANGLE PROJECTION    |          | SCALE |          | 1:1  |   |    |              |

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com