



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.




17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



8-Way Radial Combiner/Divider

Model D9710

Frequency:	1000 - 2500 MHz
Power:	2000 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.40:1 Max.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

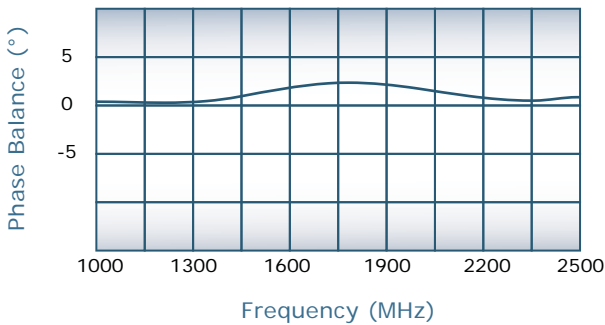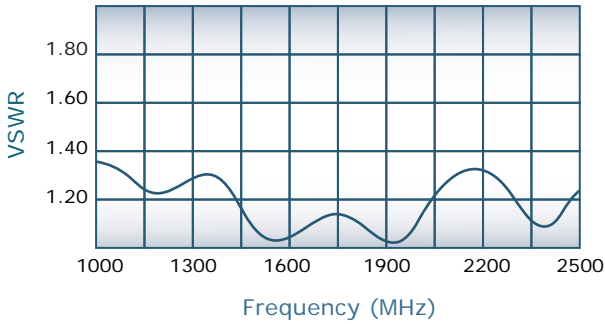
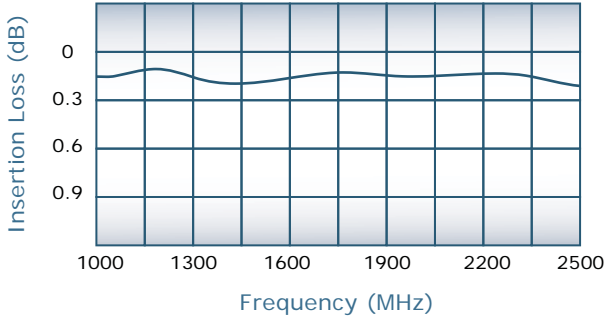


Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Unit Supplied with Internal Directional Coupler (Upon Request)

Connector Configurations

Model	J9 (Sum Port)	J1-J8 (Input/Output)
D9710-80	1 5/8" EIA	N Female
D9710-82	1 5/8" EIA	SMA
D9710-808	1 5/8" EIA	TNC Male

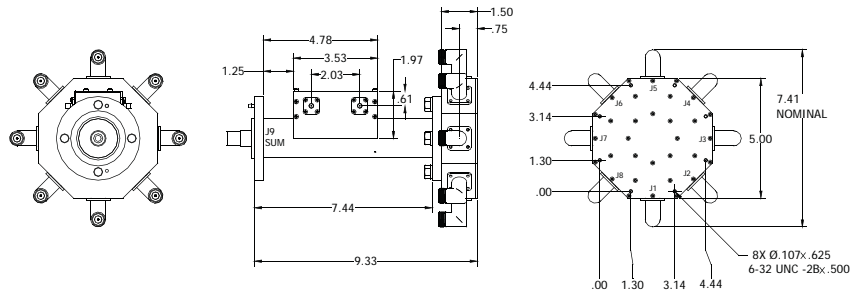

SINCE 1965

Specifications subject to change without notice



Send Us Your Specs for Custom Designs