






**DECADES AHEAD<sup>®</sup>**  
high power RF devices

**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com

**8-Way Radial Combiner/Divider**

**Model D9816**

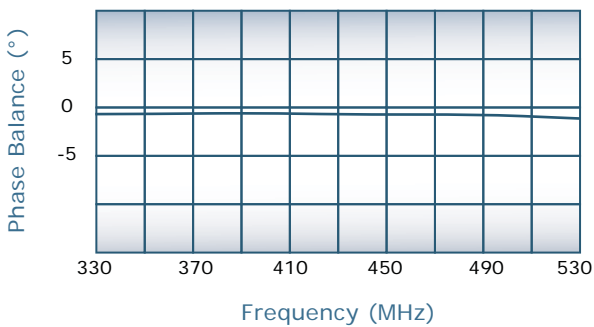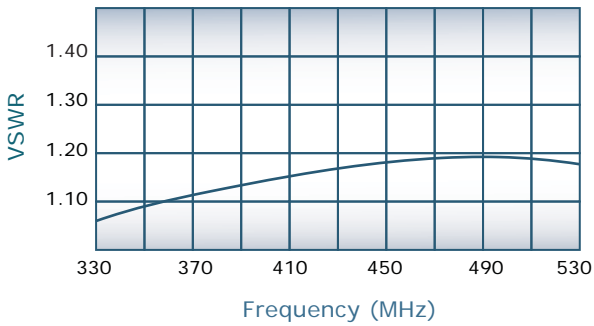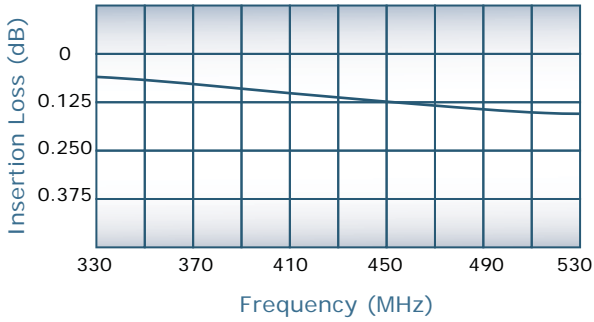



Frequency:	330 - 530 MHz
Power:	10,000 W CW
Insertion Loss:	0.25 dB Max.
VSWR:	1.30:1 Max.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request

**Connector Configurations**

Model	J9 (Sum Port)	J1-J8 (Input/Output)
D9816-90	3 1/8" EIA	N Female
D9816-97	3 1/8" EIA	Rt. Angle 7/16 Female
D9816-98	3 1/8" EIA	Rt. Angle N Female

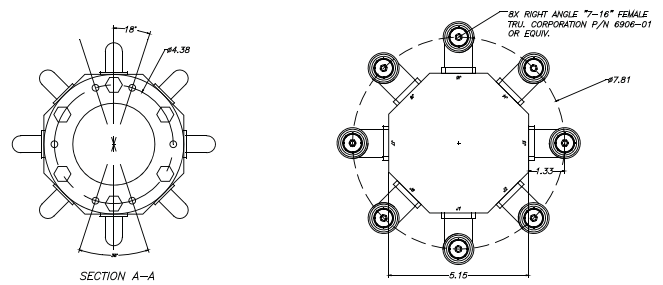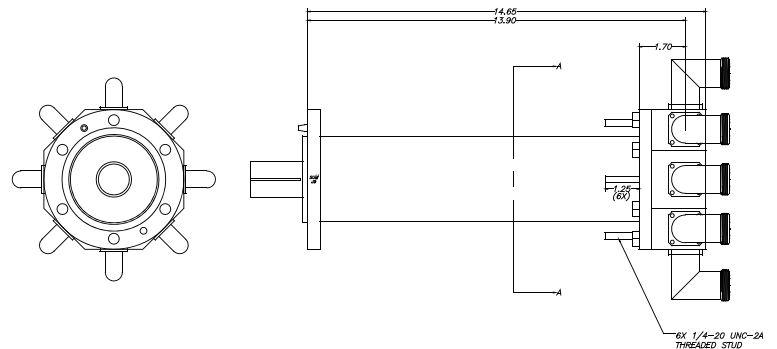

**SINCE 1965**

Specifications subject to change without notice



**Send Us Your Specs for Custom Designs**