



DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com



3-Way Combiner/Divider
Model D9866

Frequency:	30 - 500 MHz
Power:	750 W CW
Insertion Loss:	1.0 dB Max.
VSWR:	1.50:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	± 0.35 dB Max.

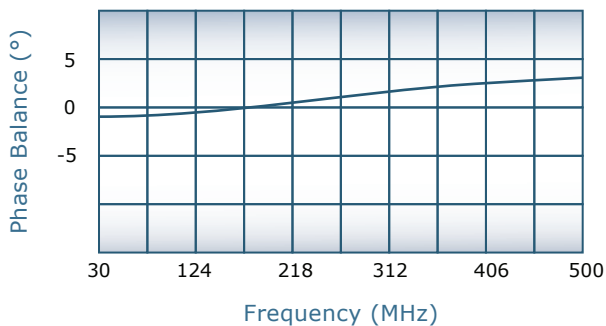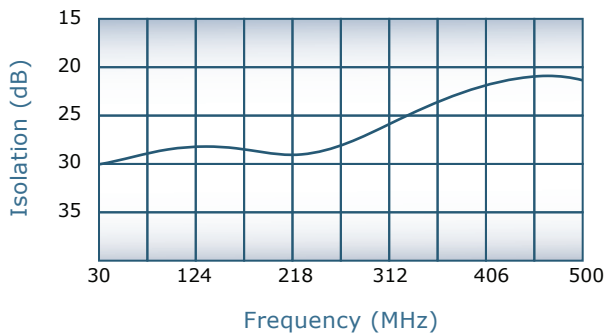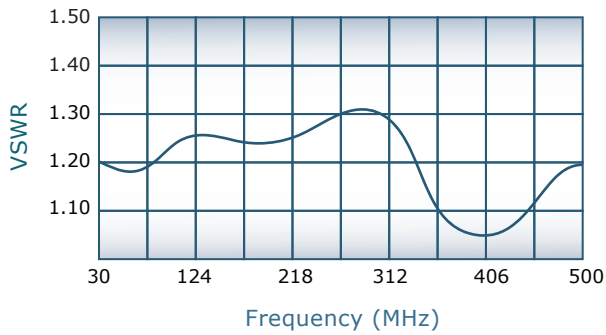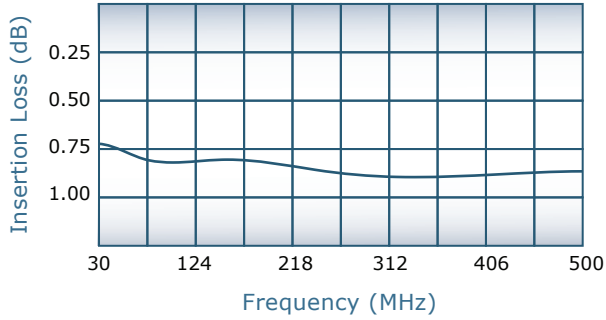

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request

Connector Configurations

Model	J1 (Sum Port)	J2-J4 (Input/Output)
D9866-10	N Female	N Female
D9866-20	7/16 Female	N Female
D9866-41	SC Female	N Female

