

### PRODUCT DATA SHEET D6857

**Werlatone**® *Mismatch Tolerant*® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone**® designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

#### Features:

High Power Wide Bandwidths Small Size Custom Designs Available

# **Electrical Specifications:**

Frequency: 1200 - 1400 MHz
Power: 4000 W CW
Insertion Loss: 0.5 dB Max.
VSWR: 1.35:1 Max.
Phase Balance: ±5° Max.

Amplitude Balance: 0.25 dB Max. Isolation: Non-Isolated

# **Mechanical Specifications:**

Type: Connectorized Material: Aluminum 6061-T6

Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class

3 (Yellow Iridite)

Operating Temperature:  $-55^{\circ}$ C to  $+75^{\circ}$ C Storage Temperature:  $-60^{\circ}$ C to  $+85^{\circ}$ C

Size: RADIAI

## **Connector Configurations:**

Model Sum Port (J33) Input/Output (J1-J32)

 D6857-80
 1 5/8" EIA
 N Female

 D6857-82
 1 5/8" EIA
 SMA

 D6857-808
 1 5/8" EIA
 TNC Male

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com







PRODUCT DATA SHEET D6857

# Performance Data (Specifications subject to change without notice):

Insertion Loss:

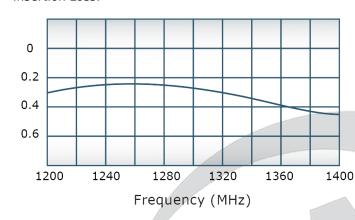

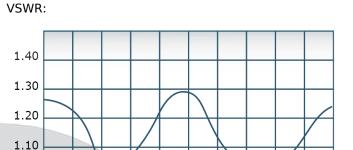

Frequency (MHz)

1320

1360

1400

1280


Since 1965:




# Phase Balance:

1200

1240

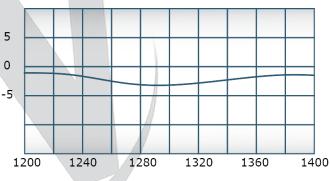

Frequency (MHz)

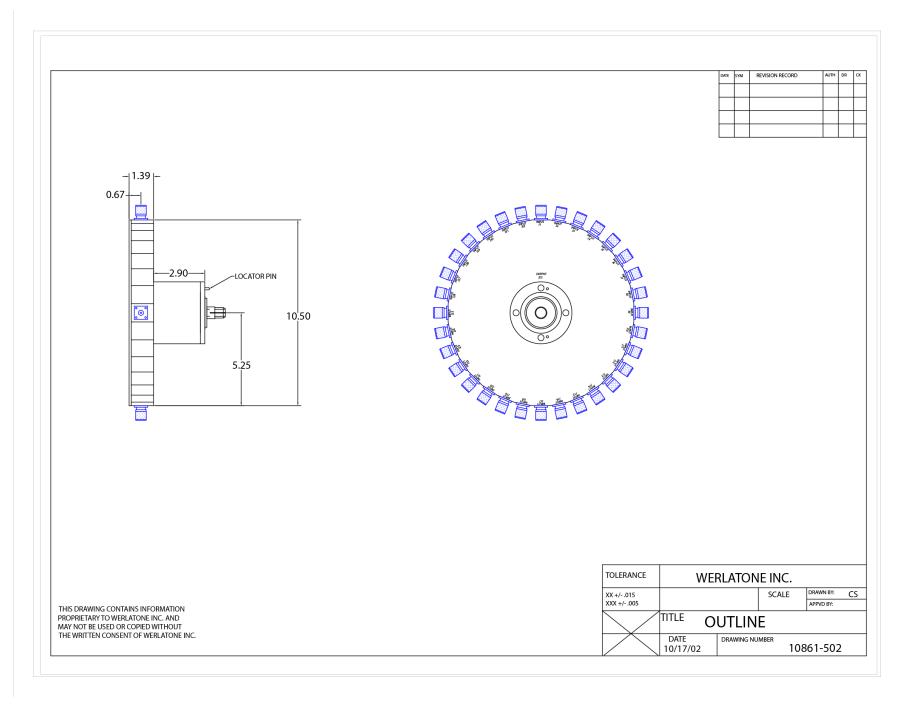

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com