



**WERLATONE**

SINCE 1965

Werlatone, Inc.  
 17 Jon Barrett Road  
 Patterson, New York 12563  
 T 845.278.2220  
 F 845.278.3440  
 www.werlatone.com



## 40 dB Dual Directional Coupler Model C8998

Frequency: 100-3000 MHz

Power: 100-500 MHz (400 W CW)  
 500-1000 MHz (300 W CW)  
 1000-3000 MHz (250 W CW)

Insertion Loss: 0.40 dB Max.





Coupling: 40 dB +/- 1.0 dB Nom.

VSWR: 1.25:1 Max.

Flatness: ± 1.0 dB Max.

Directivity: 18 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.

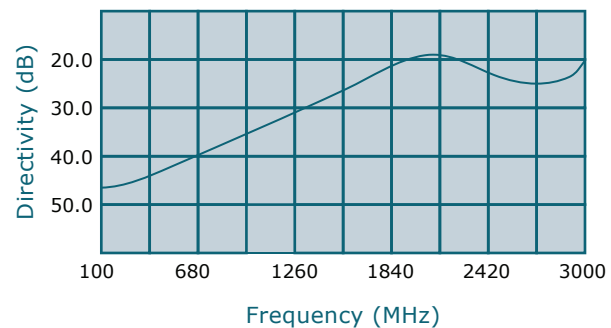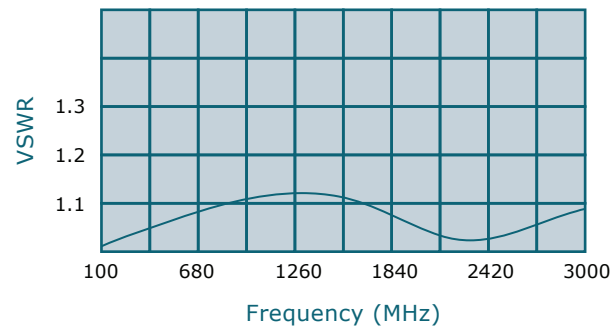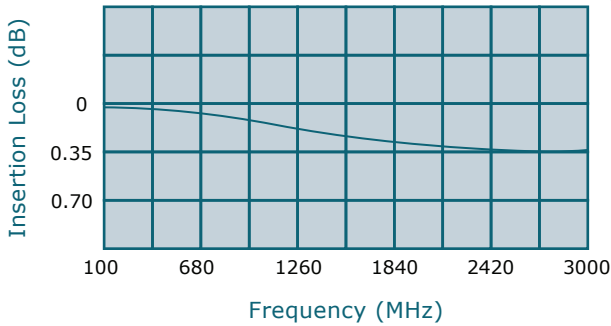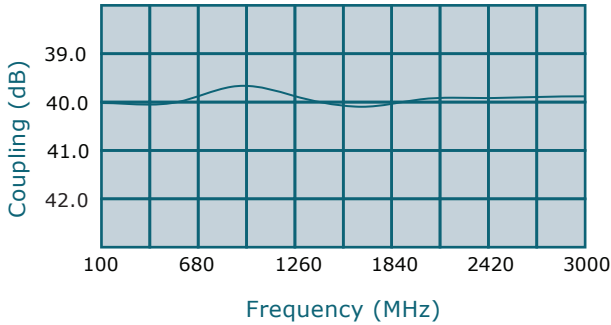

\*\*Subject to change without notice

Connector Configuration		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Ports)
C8998-10	N Female	N Female
C8998-12	N Female	SMA
C8998-102	SMA	SMA

