




DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com

Absorptive Low Pass Filter

Model AF11041

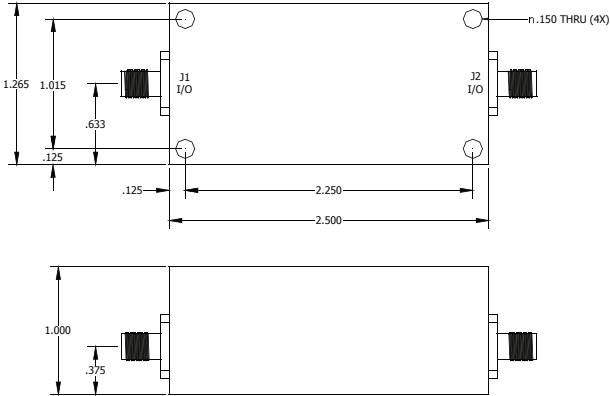

Pass Band: 10 - 900 MHz
Stop Band: 1700 - 4000 MHz
Power: 100 W CW (Pass Band)
Power: 10 W CW (Stop Band)
Insertion Loss: 0.6 dB Max. (Pass Band)
Rejection: 53 dB Min. (1700-4000 MHz)
VSWR: 1.30:1 Max. (10-900 MHz)
VSWR: 1.60:1 Max. (901-4000 MHz)


Connector Configurations

Model	J1 (Input/Output)	J2 (Input/Output)
AF11041-10	N Female	N Female
AF11041-12	N Female	SMA
AF11041-102	SMA	SMA


Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Operating Temperature: -55°C to +75°C

VSWR:

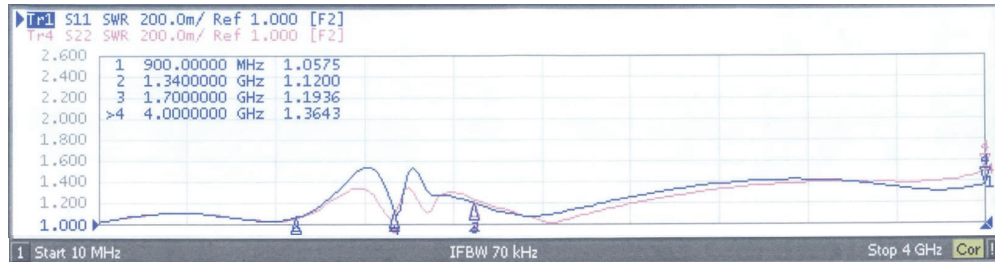

Insertion Loss (In-Band):

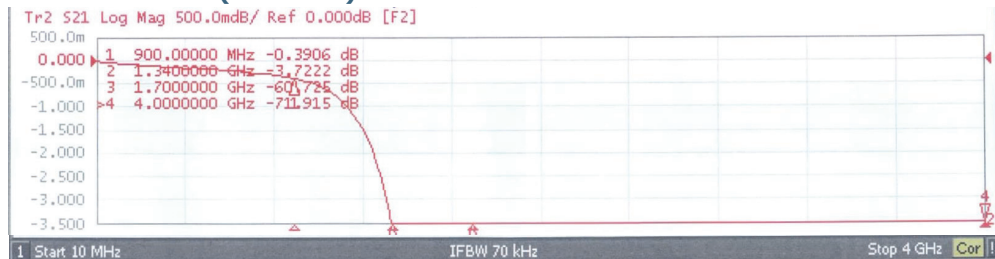

Rejection:

