







DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com

20 dB Uni-Directional Coupler
Model C2408

Frequency:	1 - 500 MHz
Power:	5 W CW
Coupling:	20 ± 1.0 dB Nom.
Insertion Loss:	1.0 dB Max.*
VSWR:	1.20:1 Max.
Flatness:	0.5 dB Max.
Directivity:	25 dB Min.

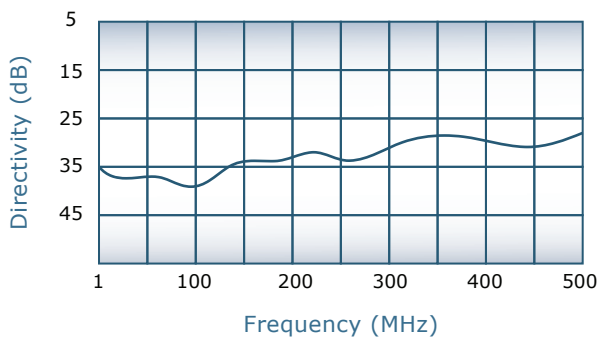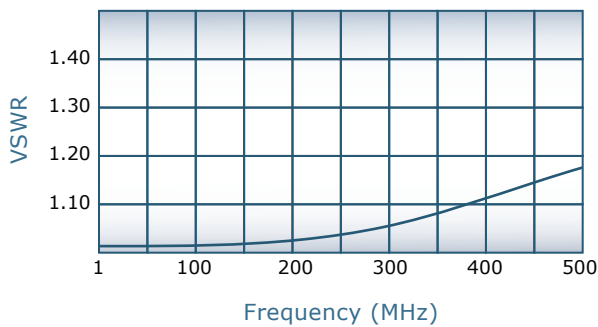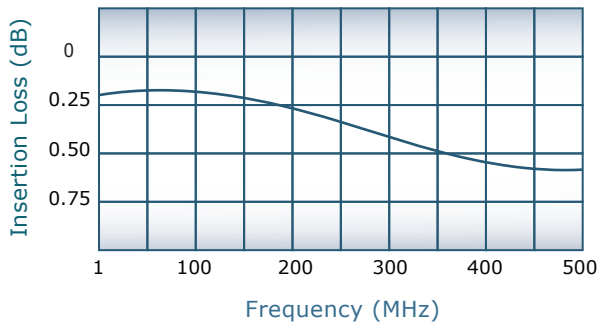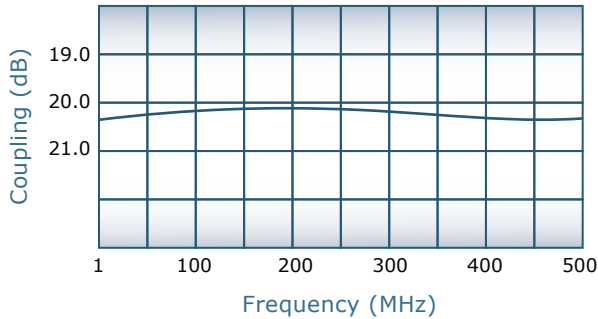

Notes

- * Does not include theoretical coupling loss
- All specifications guaranteed
- Test data provided with each unit shipped
- Weight: 3/8 pounds
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1, J2 (Main Line)	J3 (Coupled Port)
C2408-10	N Female	N Female
C2408-714	N Male	N Female

