







DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com

60 dB Dual Directional Coupler
Model C5023

Frequency:	2 - 30 MHz
Power:	25,000 W CW
Coupling:	60 ± 1.0 dB Nom.
Insertion Loss:	0.05 dB Max. *
VSWR:	1.10:1 Max.
Flatness:	0.5 dB Max.
Directivity:	20 dB Min.

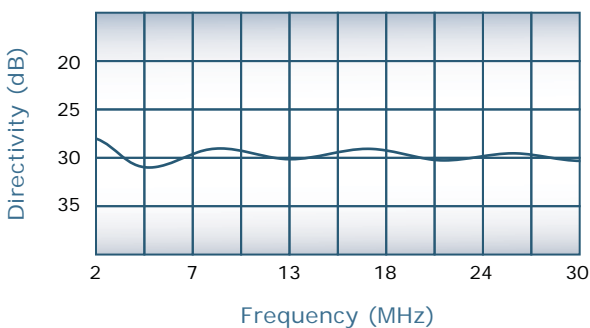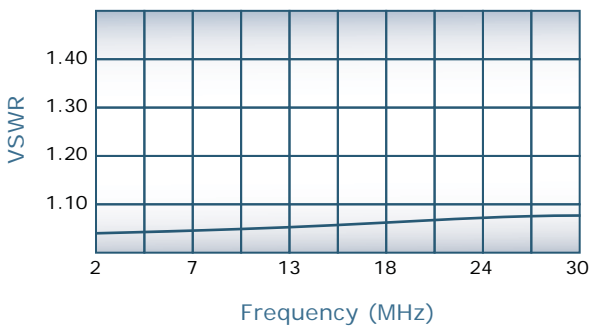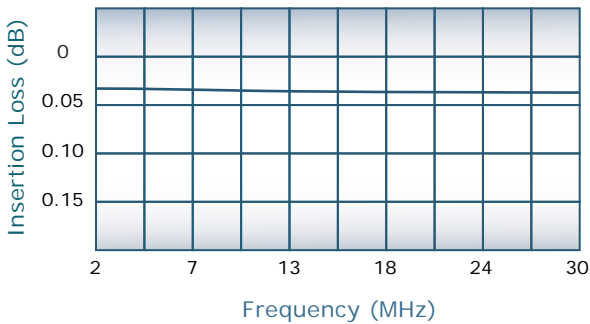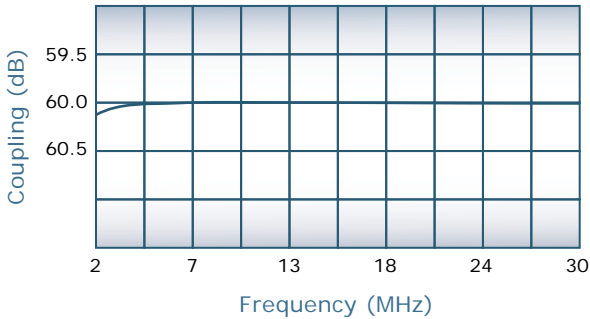

Notes

- * Does not include theoretical coupling loss
- All specifications guaranteed
- Test data provided with each unit shipped
- Weight: 6 Pounds
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1,J2 (Main Line)	J3,J4 (Coupled Ports)
C5023-91	3 1/8" EIA	N Female
C5023-93	3 1/8" EIA	SMA
C5023-94	3 1/8" EIA	BNC

