



**DECADES AHEAD<sup>®</sup>**  
high power RF devices





**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com



**20 dB Uni-Directional Coupler**  
**Model C5562**

Frequency:	1 - 500 MHz
Power:	30 W CW
Coupling:	20 ± 1.0 dB Nom.
Insertion Loss:	1.2 dB Max. *
VSWR:	1.20:1 Max.
Flatness:	1 dB Max.
Directivity:	20 dB Min.

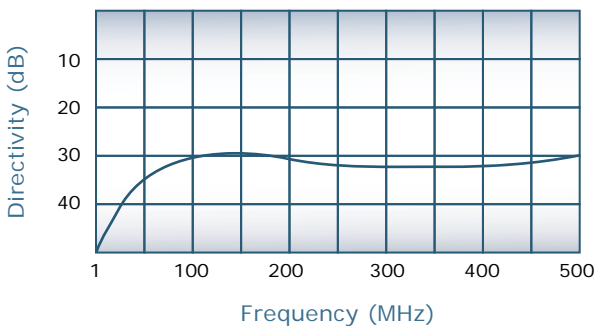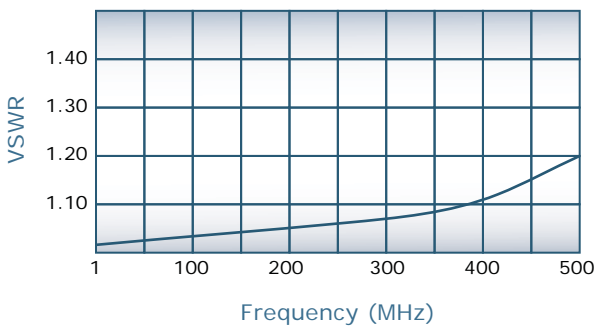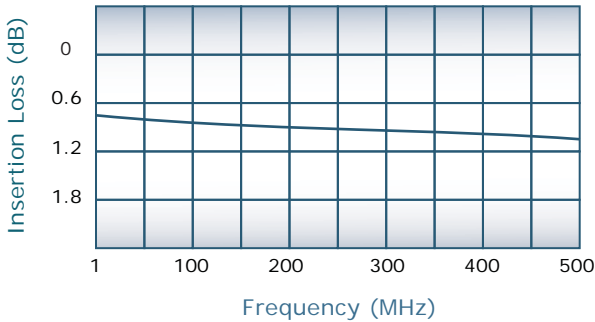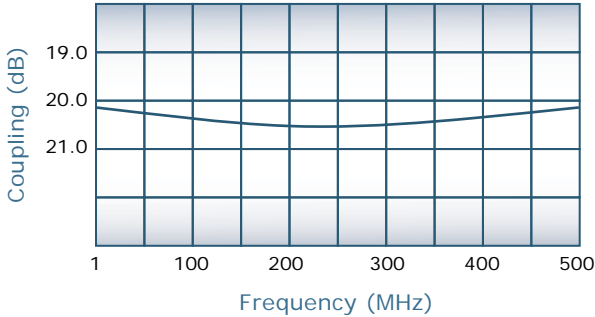

**Notes**

- \* Does not include theoretical coupling loss
- All specifications guaranteed
- Test data provided with each unit shipped
- Weight: 1.625 Pounds
- Operating Temperature: -55°C to +75°C

**Connector Configurations**

Model	J1,J2 (Main Line)	J3 (Coupled Port)
C5562-10	N Female	N Female
C5562-12	N Female	SMA
C5562-102	SMA	SMA

