



DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com



50 dB Dual Directional Coupler
Model C5923

Frequency:	50 - 500 MHz
Power:	5,000 W CW
Coupling:	50 ± 1.0 dB Nom.
Insertion Loss:	0.1 dB Max. *
VSWR:	1.15:1 Max.
Flatness:	± 0.5 dB Max.
Directivity:	25 dB Min.

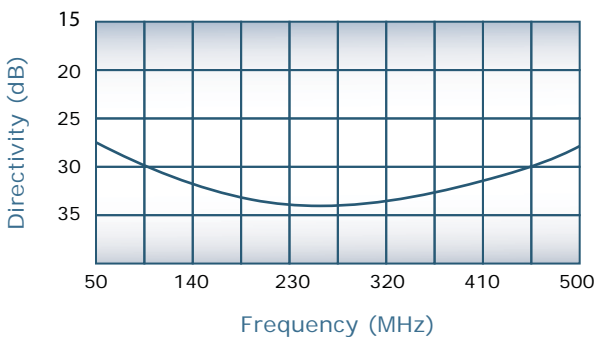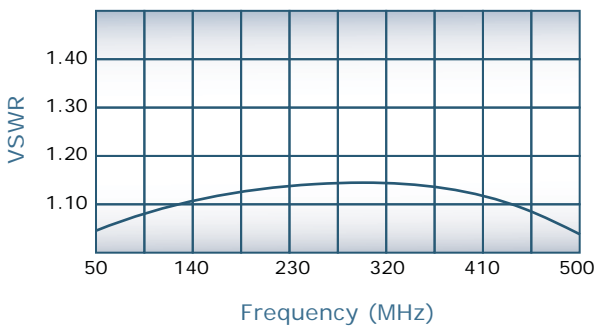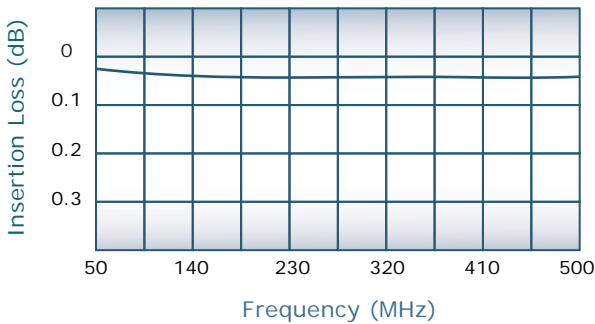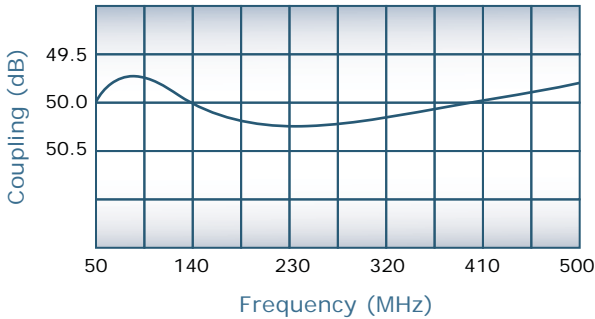

Mismatch Tolerant[®] Design

Notes

- * Does not include theoretical coupling loss
- Designed to operate, at rated power, into an Infinite VSWR
- All specifications guaranteed
- Test data provided with each unit shipped
- Weight: 1.5 Pounds
- Operating Temperature: -55°C to +75°C
- Uni-Directional version available

Mismatch Tolerant[®] is a registered trademark of **Werlatone, Inc.**

Connector Configurations

Model	J1,J2 (Main Line)	J3,J4 (Coupled Ports)
C5923-20	7/16 Female	N Female
C5923-22	7/16 Female	SMA
C5923-23	7/16 Female	BNC
C5923-71	7/8" EIA	N Female

