



DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



20 dB Bi-Directional Coupler
Model C6600

Frequency:	200 - 2000 MHz
Power:	200 W CW
Coupling:	20 ± 1.0 dB Nom.
Insertion Loss:	0.25 dB Max.
VSWR:	1.25: 1 Max.
Flatness:	1.2 dB Max.
Directivity:	18 dB Min.

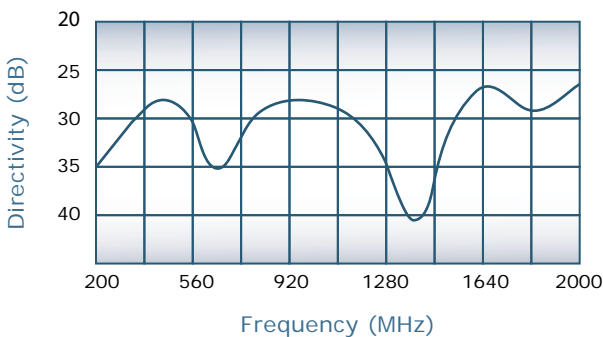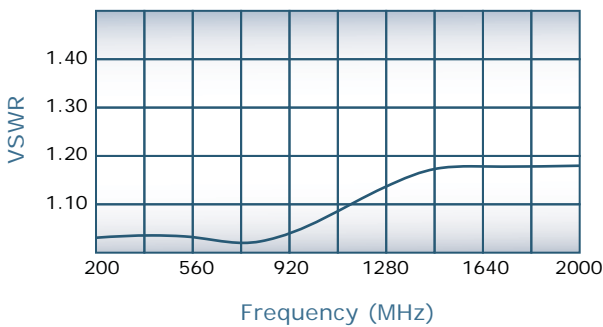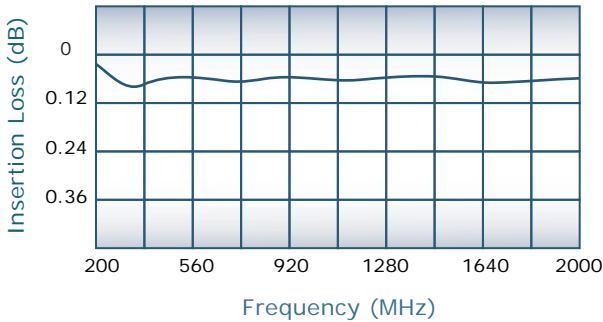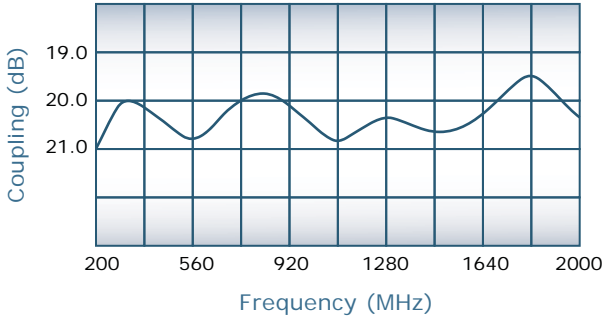

Mismatch Tolerant[®] Design

Notes

- Will operate continuously, at rated power, into an open or short condition
- All specifications guaranteed
- Test data provided with each unit shipped
- Weight: 1 Pound
- Operating Temperature: -55°C to +75°C
- Uni-Directional version available

[View Audiovisual Presentation](#)

Mismatch Tolerant[®] is a registered trademark of Werlatone, Inc.

Connector Configurations

Model	J1, J2 (Main Line)	J3, J4 (Coupled Ports)
C6600-10	N Female	N Female
C6600-12	N Female	SMA
C6600-102	SMA	SMA

