



DECADES AHEAD[®]
high power RF devices







Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com

**6 dB Uni-Directional Coupler
Model C8217**

Frequency:	60 - 600 MHz
Power:	200 W CW
Coupling:	6 ± 1.0 dB Nom.
Insertion Loss:	0.35 dB Max. *
VSWR:	1.20:1 Max.
Flatness:	1.0 dB Max.
Directivity:	20 dB Min.

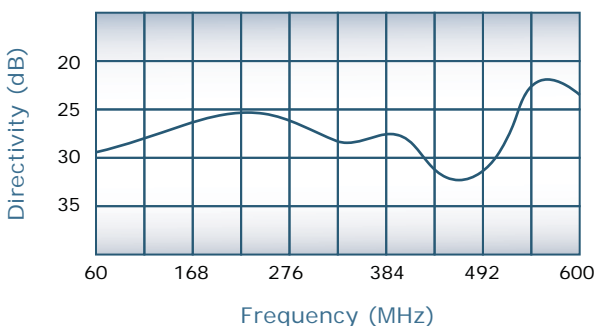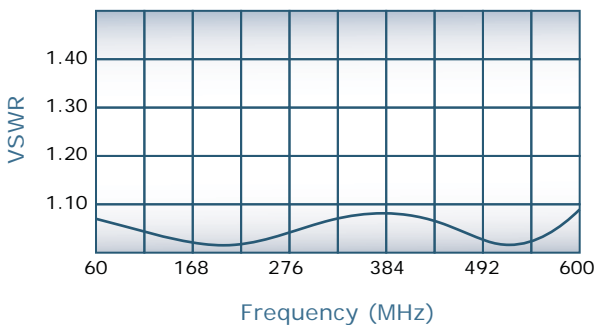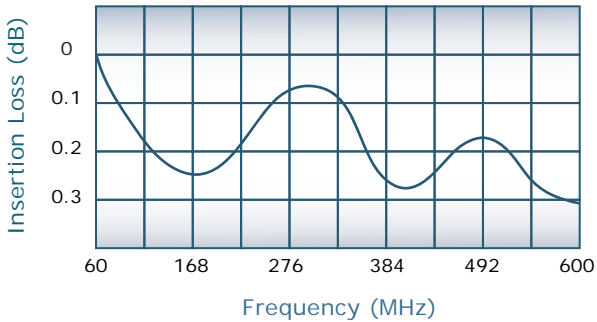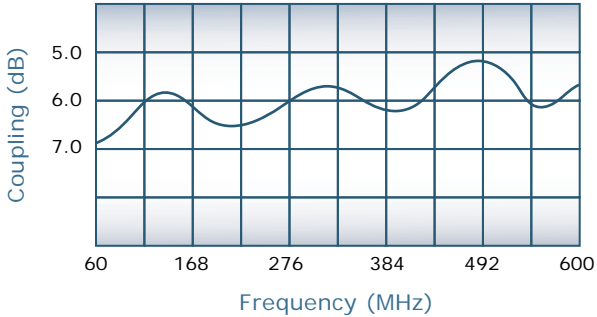

Notes

- * Does not include Theoretical Coupling Loss
- All specifications guaranteed
- Test data provided with each unit shipped
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1, J2 (Main Line)	J3 (Coupled Port)
C8217-10	N Female	N Female
C8217-12	N Female	SMA
C8217-102	SMA	SMA

