




DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com



30 dB Dual Directional Coupler
Model C9401

Frequency:	20 - 520 MHz
Power:	100 W CW
Coupling:	30 ± 1.0 dB Nom.
Insertion Loss:	0.7 dB Max.
VSWR:	1.25:1 Max.
Flatness:	0.5 dB Max.
Directivity:	20 dB Min.

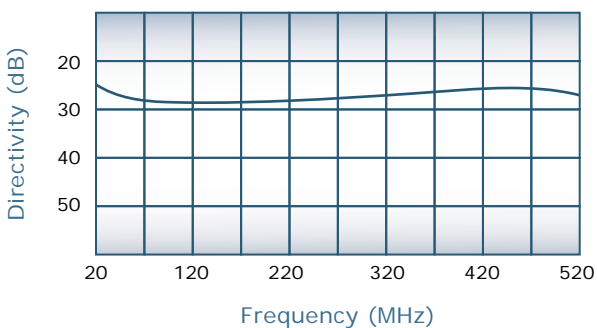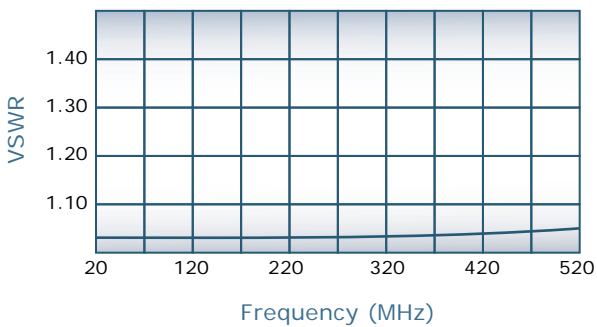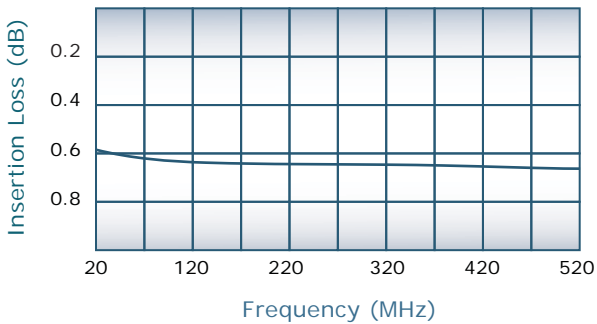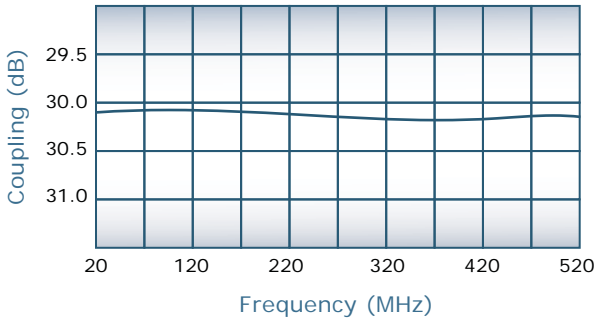

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Weight: 1.4 Ounces
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1, J2 (Main Line)	J3, J4 (Coupled Ports)
C9401-102	SMA	SMA

