



DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



20 dB Uni-Directional Coupler
Model C9481

Frequency:	300 - 2000 MHz
Power:	20 W CW
Coupling:	20 ± 1.0 dB Nom.
Insertion Loss:	0.35 dB Max. *
VSWR:	1.20:1 Max.
Flatness:	1.0 dB Max.
Directivity:	18 dB Min.

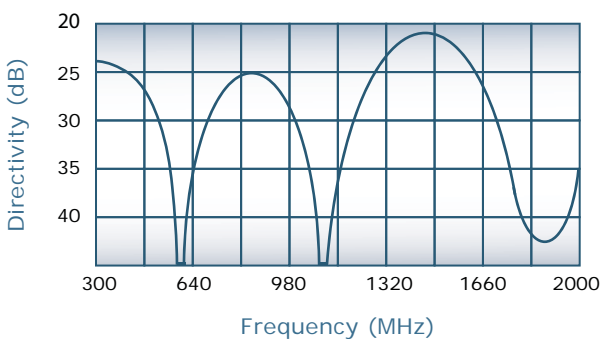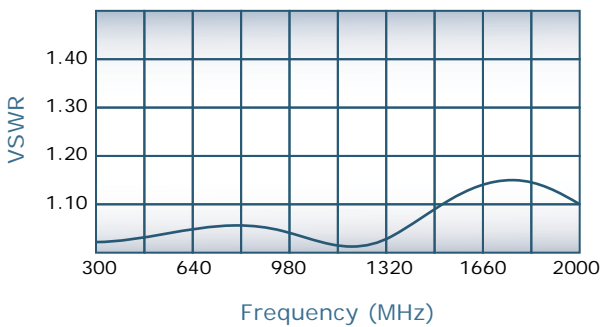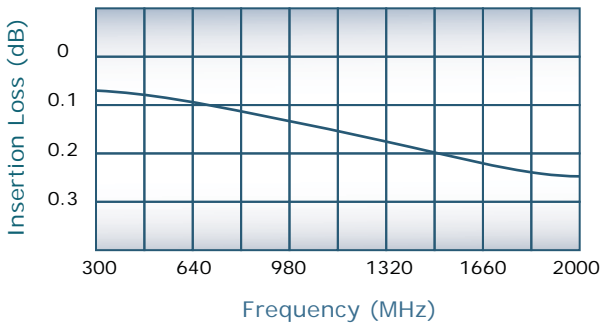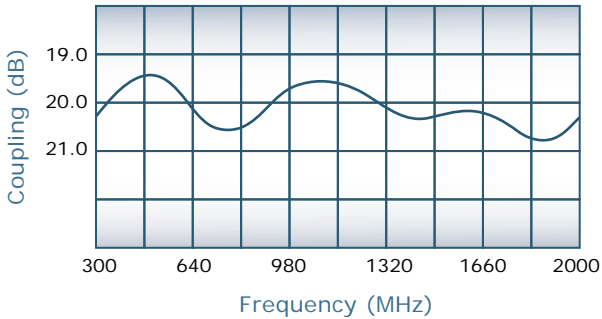

Notes

- * Does not include theoretical coupling loss
- All specifications guaranteed
- Test data provided with each unit shipped
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1, J2 (Main Line)	J3 (Coupled Port)
C9481-102	SMA	SMA

