



DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com

2-Way Combiner/Divider

Model D10219

| | |
|--------------------|----------------|
| Frequency: | 0.1 - 80 MHz |
| Power: | 25 W CW |
| Insertion Loss: | 0.6 dB Max. |
| VSWR: | 1.50:1 Max. |
| Isolation: | 15 dB Min. |
| Phase Balance: | ± 8° Max. |
| Amplitude Balance: | ± 0.35 dB Max. |

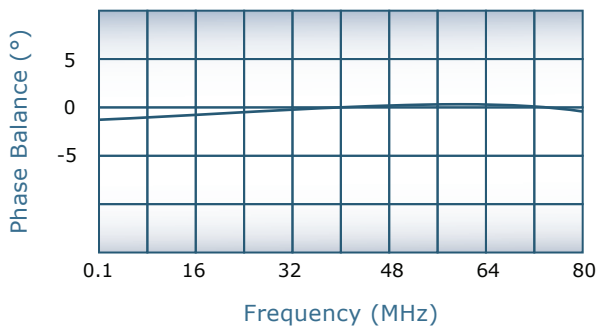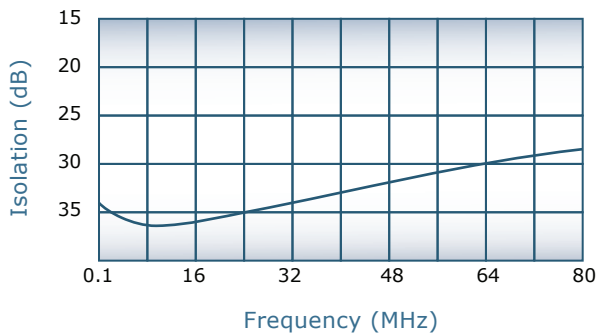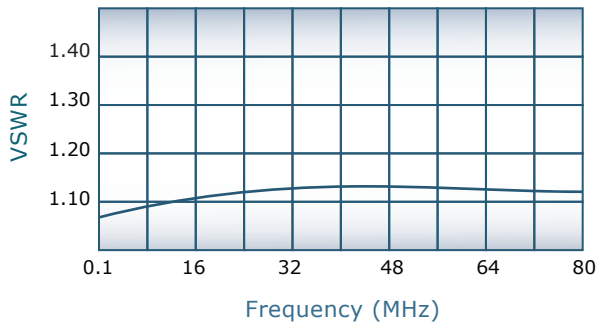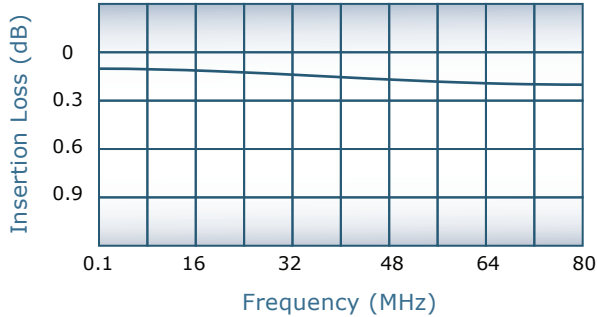

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +75°C

Connector Configurations

| Model | J1 (Sum Port) | J2,J3 (Input/Output) |
|------------|---------------|----------------------|
| D10219-10 | N Female | N Female |
| D10219-12 | N Female | SMA |
| D10219-102 | SMA | SMA |

