



**DECADES AHEAD<sup>®</sup>**  
high power RF devices





**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com

**4-Way Combiner/Divider**

**Model D10360**

|                    |              |
|--------------------|--------------|
| Frequency:         | 20 - 130 MHz |
| Power:             | 8,000 W CW   |
| Insertion Loss:    | 0.3 dB Max.  |
| VSWR:              | 1.25:1 Max.  |
| Isolation:         | 20 dB Min.   |
| Phase Balance:     | ± 5° Max.    |
| Amplitude Balance: | 0.2 dB Max.  |

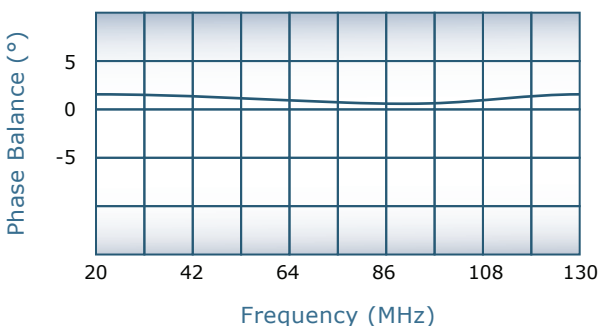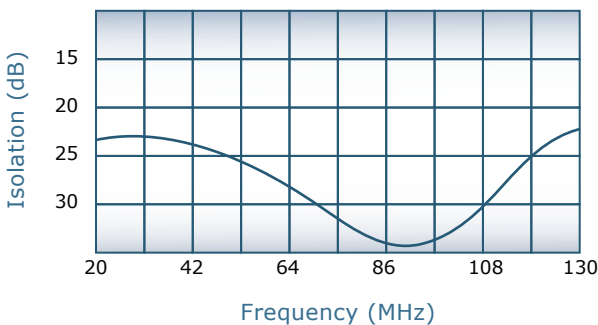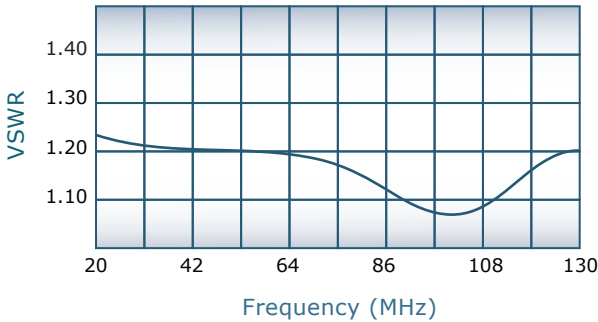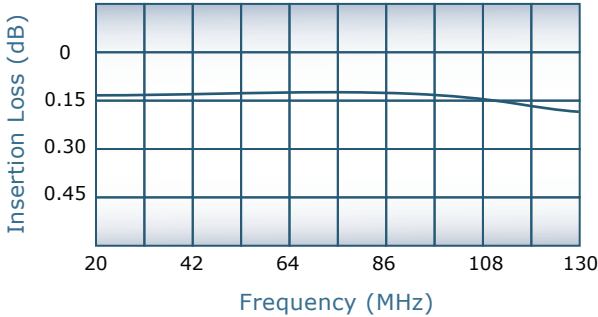

**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +75°C
- J6 Port: Sniffer Port, SMA Female Connector

**Connector Configurations**

| Model     | J5 (Sum Port) | J1-J4 (Input/Output) |
|-----------|---------------|----------------------|
| D10360-20 | 7/16 Female   | N Female             |
| D10360-30 | LC Female     | N Female             |
| D10360-74 | 7/8" EIA      | 7/16 Female          |
| D10360-84 | 1 5/8" EIA    | 7/16 Female          |

