




DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



4-Way Combiner/Divider

Model D10363

Frequency: 290 - 320 MHz

Power: 400 W CW
150 W/Input Non-Coherent





Insertion Loss: 0.3 dB Max.

VSWR: 1.20:1 Max.

Isolation: 25 dB Min.

Phase Balance: $\pm 5^\circ$ Max.

Amplitude Balance: 0.2 dB Max.

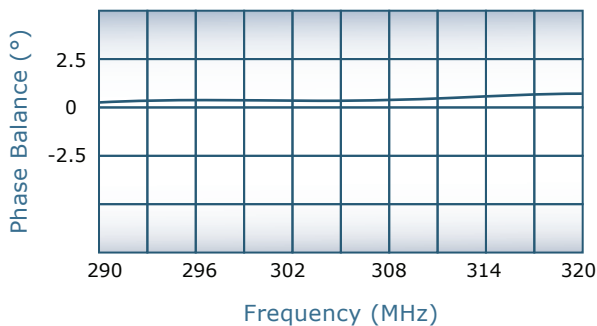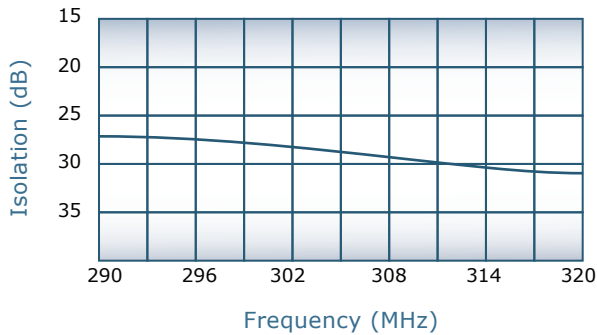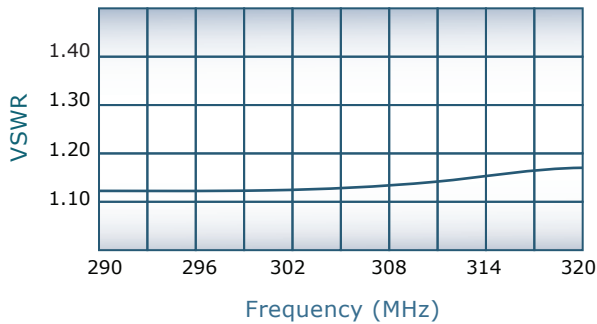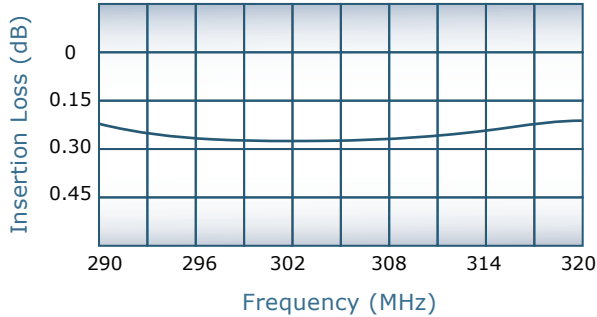

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 5.75 pounds
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D10363-10	Female	N Female
D10363-20	7/16 Female	N Female
D10363-41	SC Female	N Female

