



DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



4-Way Combiner/Divider
Model D10386

Frequency:	1.5 - 40 MHz
Power:	5000 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.25:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.15 dB Max.

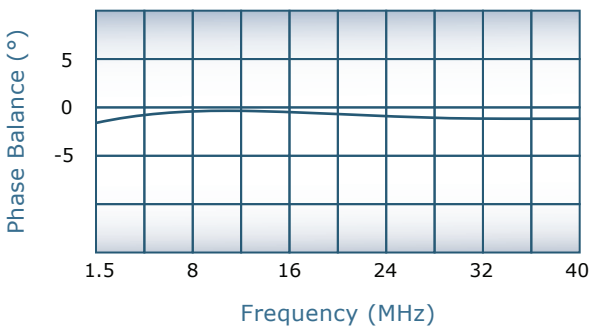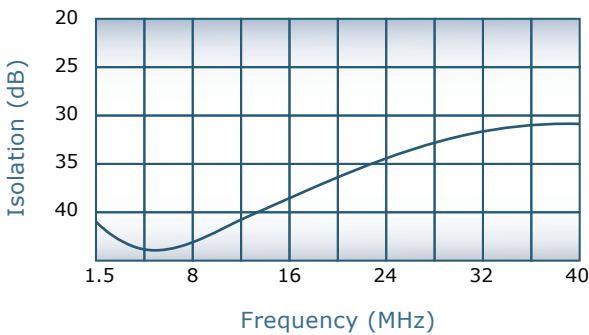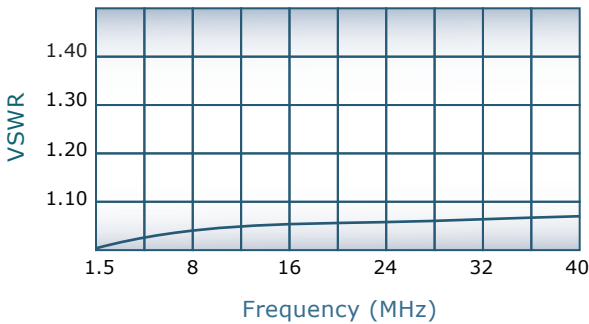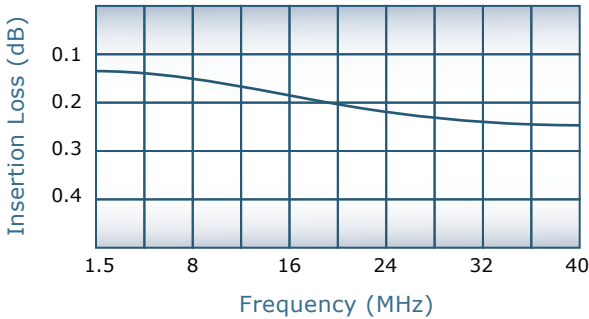

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate Connector Configurations Upon Request
- Weight: 25 Pounds
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D10386-20	7/16 Female	N Female
D10386-30	LC Female	N Female
D10386-40	SC Female	SC Female
D10386-41	SC Female	N Female

