



**DECADES AHEAD<sup>®</sup>**  
high power RF devices





**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com



**4-Way Combiner/Divider**  
**Model D10386**

Frequency:	1.5 - 40 MHz
Power:	5000 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.25:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.15 dB Max.

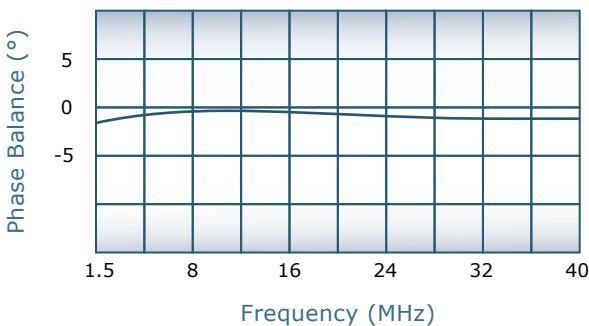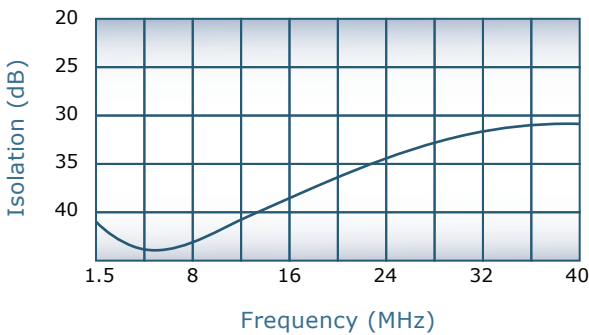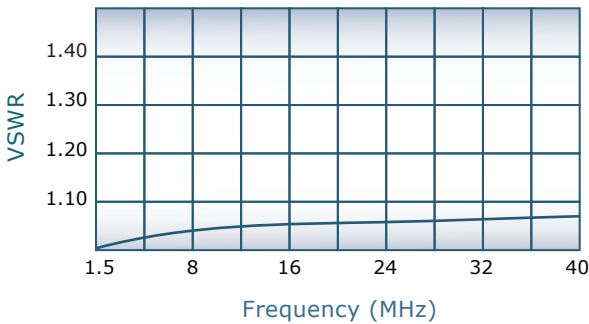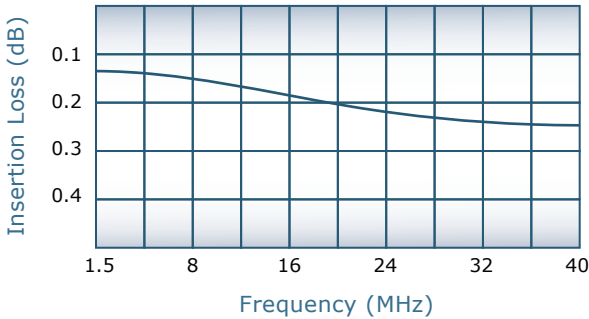

**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate Connector Configurations Upon Request
- Weight: 25 Pounds
- Operating Temperature: -55°C to +75°C

**Connector Configurations**

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D10386-20	7/16 Female	N Female
D10386-30	LC Female	N Female
D10386-40	SC Female	SC Female
D10386-41	SC Female	N Female

