



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com

2-Way Combiner/Divider

Model D10401

Frequency: 800 - 2000 MHz

Power: 25 W CW
200 W Peak





Insertion Loss: 0.5 dB Max.

VSWR: 1.30:1 Max.

Isolation: 15 dB Min.

Phase Balance: $\pm 5^\circ$ Max.

Amplitude Balance: ± 0.2 dB Max.

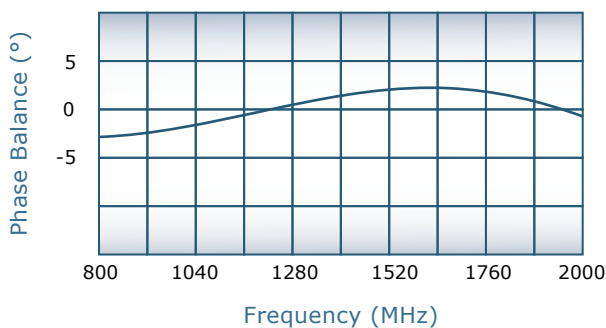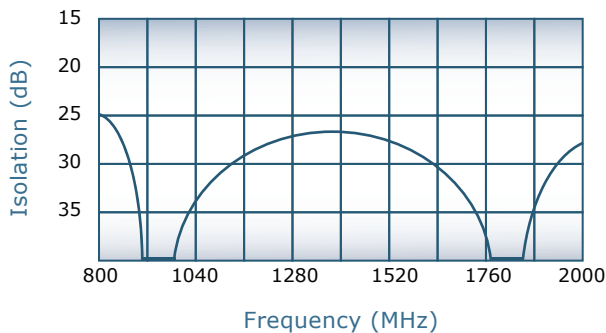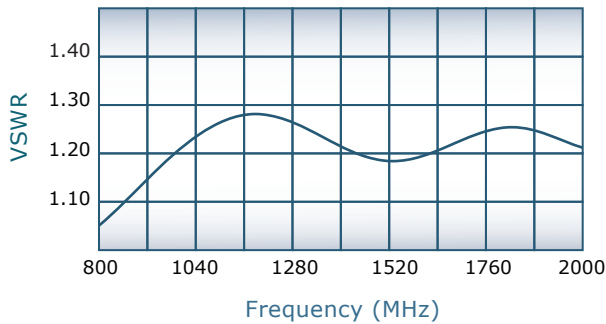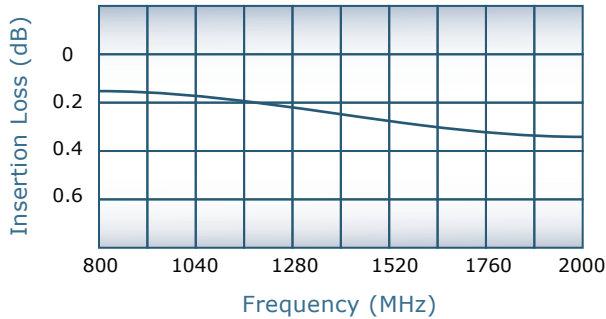

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1 (Sum Port)	J2,J3 (Input/Output)
D10401-102	SMA	SMA

