DECADES AHEAD®

high power RF devices

Werlatone®, Inc.
17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com

2-Way Combiner/Divider

Model D10407

Frequency:	3100 - 3500 MHz
Power:	400 W CW 3 kW Peak
Insertion Loss:	0.3 dB Max.
VSWR:	1.40:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.25 dB Max.

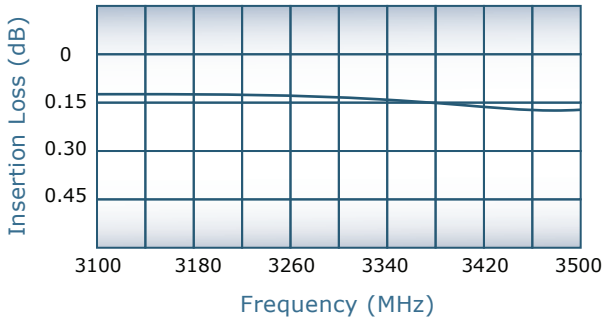

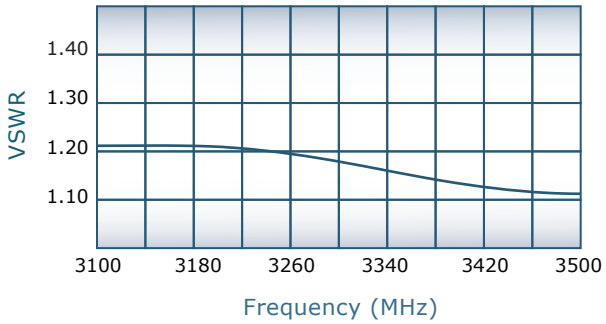

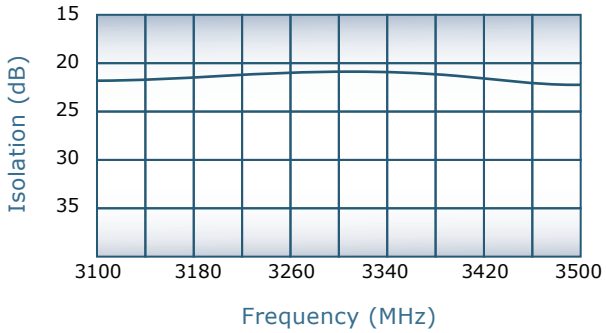

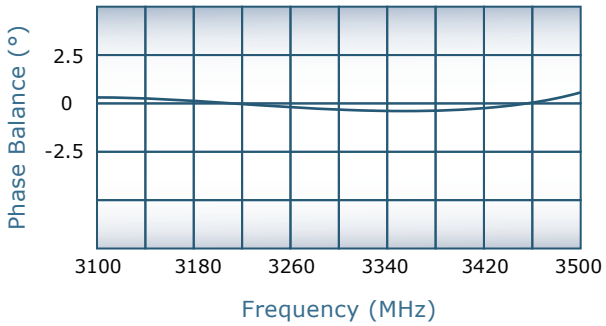

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1 (Sum Port)	J2,J3 (Input/Output)
D10407-10	N Female	N Female
D10407-12	N Female	SMA
D10407-20	7/16 Female	N Female

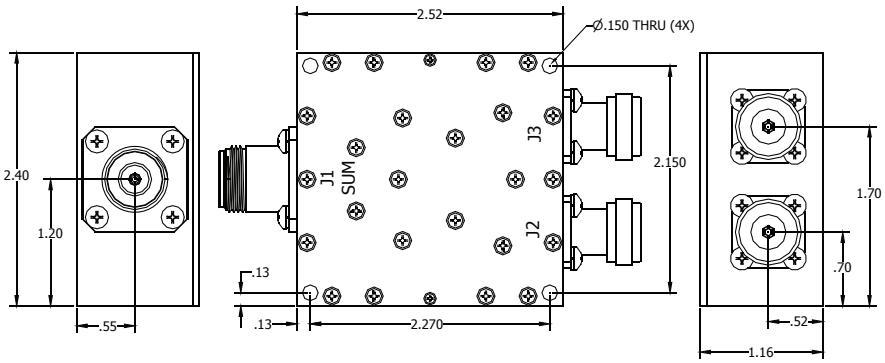

Specifications subject to change without notice

Send Us Your Specs for Custom Designs