







DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com

2-Way Combiner/Divider

Model D10458

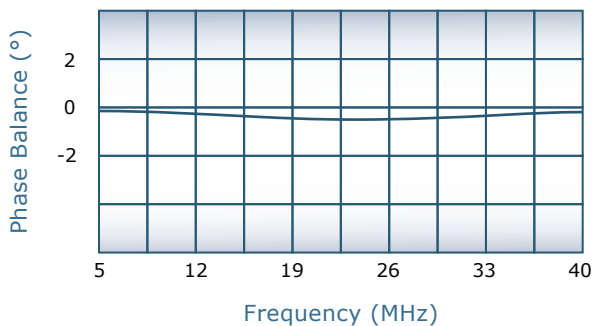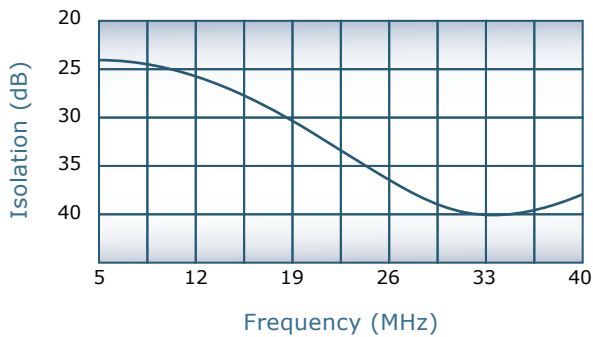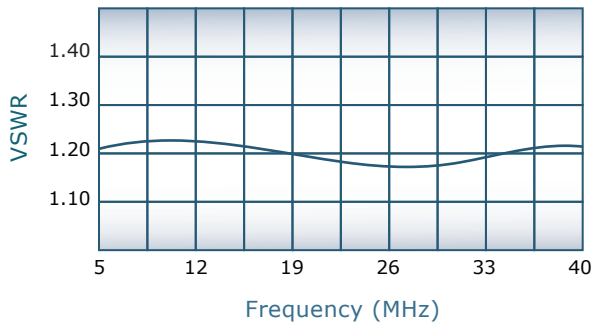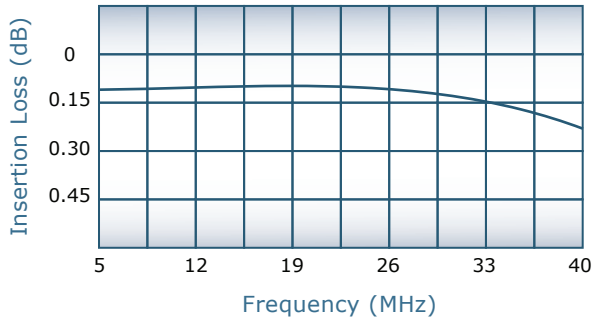

Frequency:	5 - 40 MHz
Power:	2000 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.25:1 Max.
Isolation:	22 dB Min.
Phase Balance:	± 2° Max.
Amplitude Balance:	± 0.1 dB Max.

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 3 Pounds
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1 (Sum Port)	J2,J3 (Input/Output)
D10458-10	N Female	N Female
D10458-12	N Female	SMA
D10458-13	N Female	BNC
D10458-20	7/16 Female	N Female

