

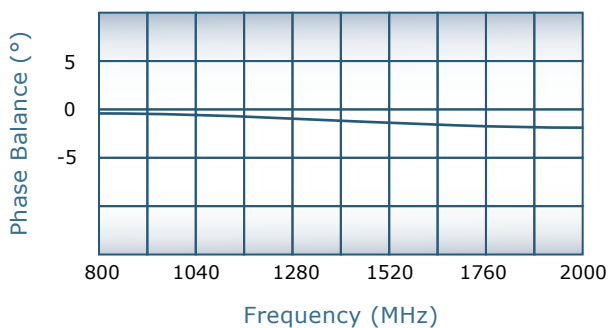
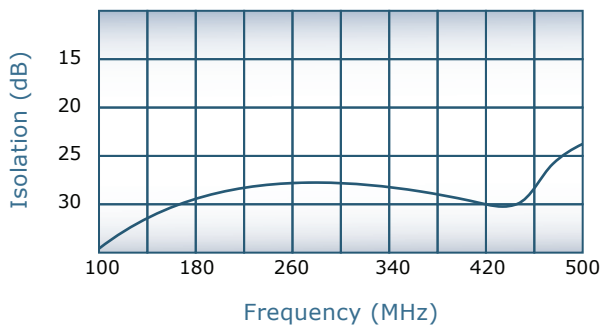


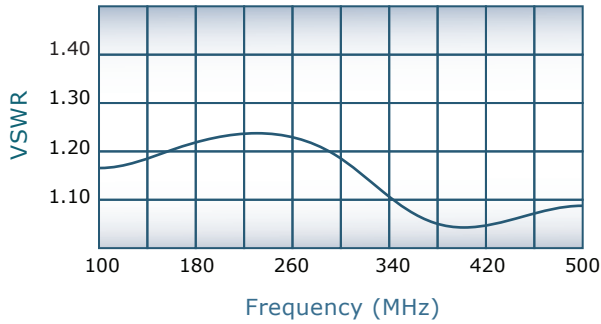

**DECADES AHEAD<sup>®</sup>**  
high power RF devices

**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com

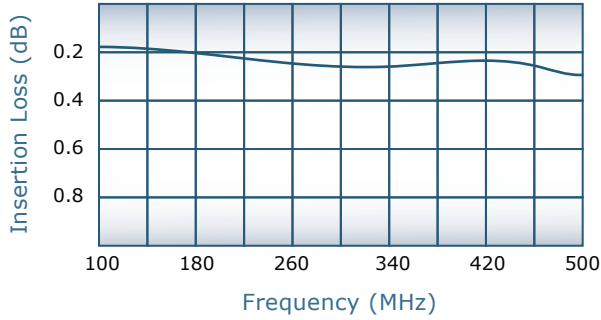

Specifications subject to change without notice

## 2-Way Combiner/Divider

### Model D10508W


Frequency:	100 - 500 MHz
Power:	200 W CW
Insertion Loss:	0.4 dB Max.
VSWR:	1.25:1
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	± 0.2 dB Max.

#### Notes

- Watertight Design, O-Ring Sealed
- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +75°C
- During normal operation, this unit will not require any heat dissipation. In the case of a failure in the cable to J2 or J3, however, the unit must be mounted to a heat spreader capable of dissipating 25 W CW

#### Connector Configurations

Model	J1 (Sum Port)	J2, J3 (Input/Output)
D10508W-10	N Female	N Female

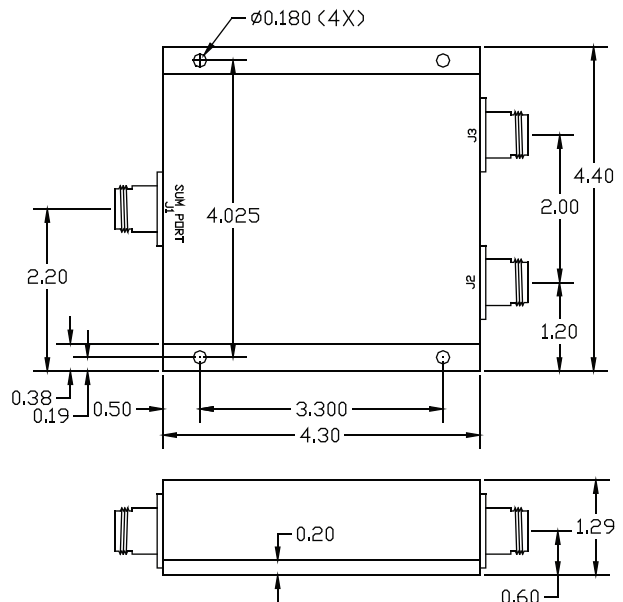

Send Us Your Specs for Custom Designs