






**DECADES AHEAD<sup>®</sup>**  
high power RF devices

**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com

**2-Way Combiner/Divider**

**Model D10757**

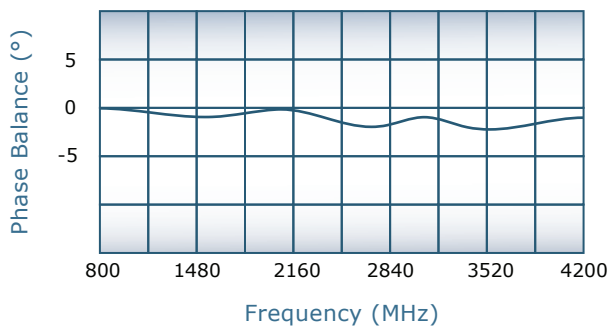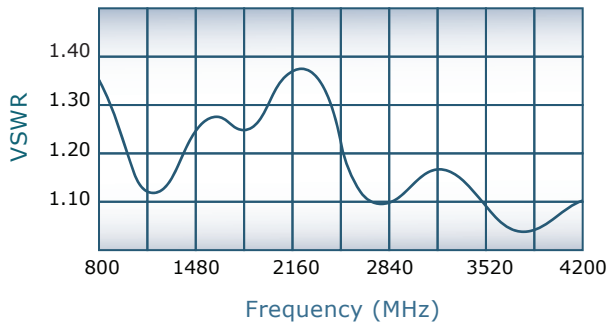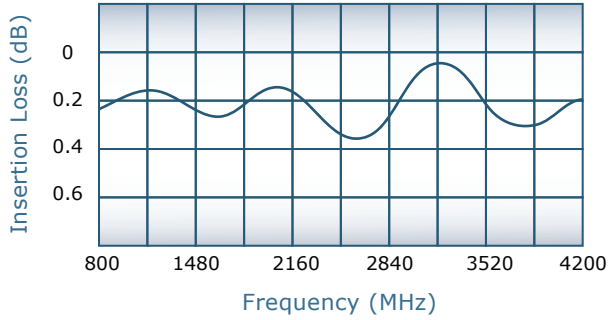


Frequency:	800 - 4200 MHz
Power:	400 W CW
Insertion Loss:	0.4 dB Max.
VSWR:	1.40:1 Max.
Isolation:	Non-Isolated
Phase Balance:	± 5° Max.
Amplitude Balance:	± 0.2 dB Max.

**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 1.3 pounds
- Operating Temperature: -55°C to +75°C

**Connector Configurations**

Model	J1 (Sum Port)	J2,J3 (Input/Output)
D10757-10	N Female	N Female
D10757-41	SC Female	N Female

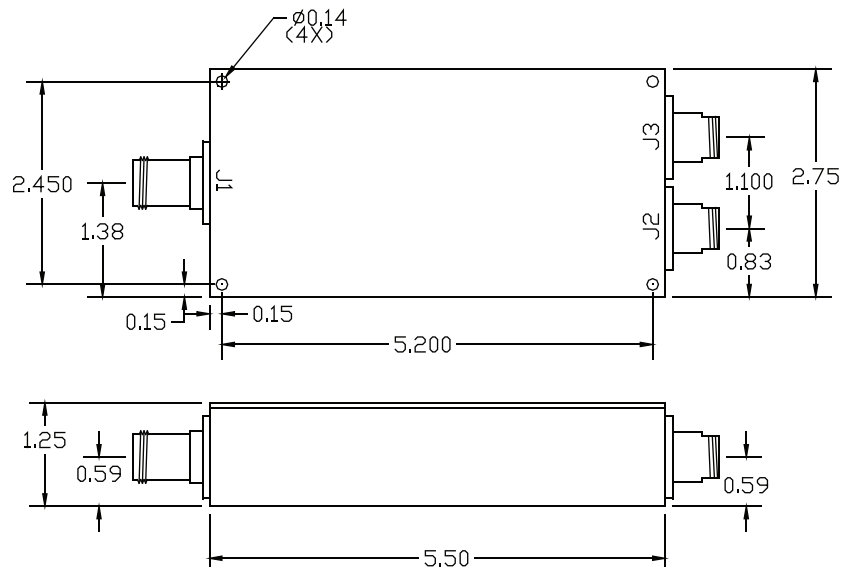

**SINCE 1965**

Specifications subject to change without notice



**Send Us Your Specs for Custom Designs**