

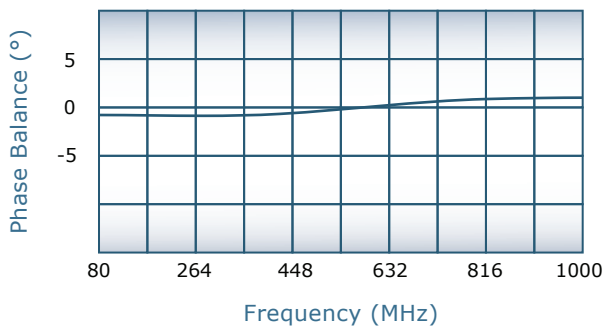
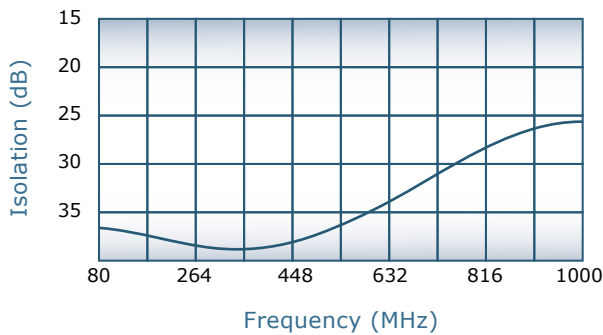


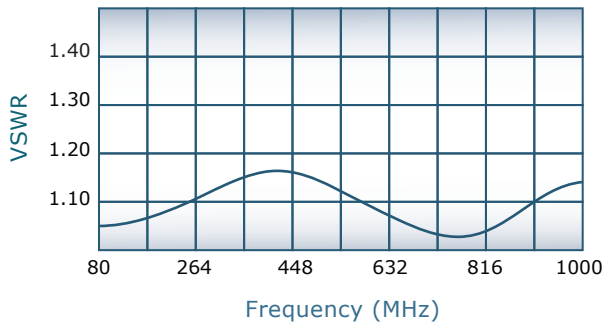

**DECADES AHEAD<sup>®</sup>**  
high power RF devices

**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com

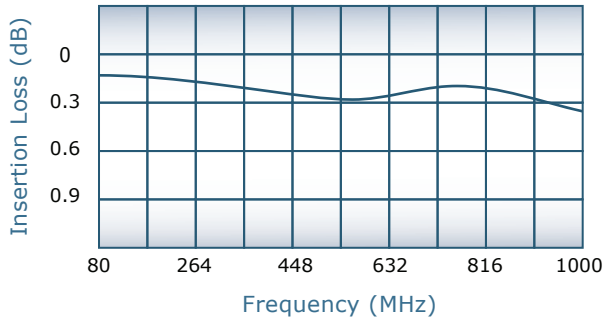

## 4-Way Combiner/Divider Model D10856

Frequency:	80 - 1000 MHz
Power:	750 W CW
Insertion Loss:	0.6 dB Max.
VSWR:	1.35:1 Max.
Isolation:	Partially Isolated
Phase Balance:	± 5° Max.
Amplitude Balance:	0.3 dB Max.

**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +65°C
- **Non-Isolated Ports:** J2 - J3: 0 dB, J4 - J5 0 dB
- **Isolated Ports:** (J2,J3) - (J4,J5): 15 dB Min.

**Connector Configurations**

Model	J1 (Sum Port)	J2-J5 (Input/Output)
D10856-10	N Female	N Female
D10856-12	N Female	SMA
D10856-13	N Female	BNC

