



**DECADES AHEAD<sup>®</sup>**  
**high power RF devices**





**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
 T (845) 278 2220      www.werlatone.com  
 F (845) 278 3440      sales@werlatone.com

## 2-Way Combiner/Divider

### Model D2076

Frequency:	1.5 - 30 MHz
Power:	3000 W CW
Insertion Loss:	0.1 dB Max.
VSWR:	1.25:1 Max.
Isolation:	22 dB Min.
Phase Balance:	± 2° Max.
Amplitude Balance:	0.1 dB Max.

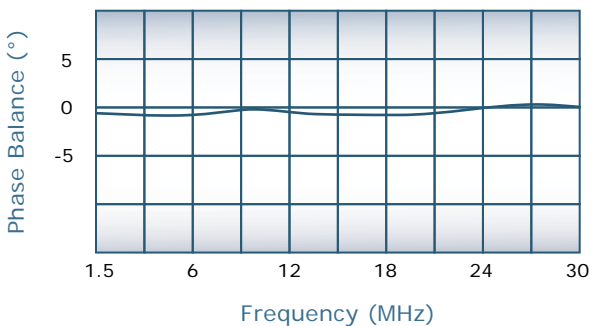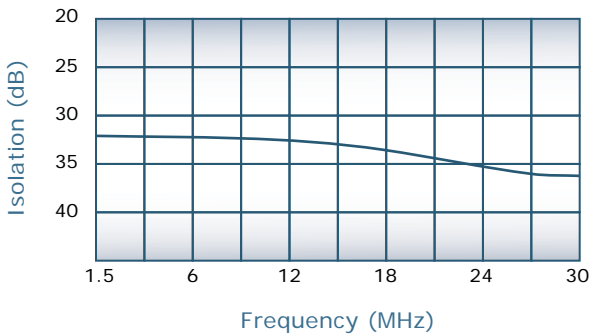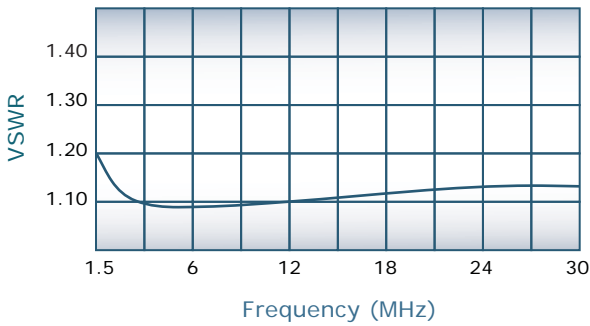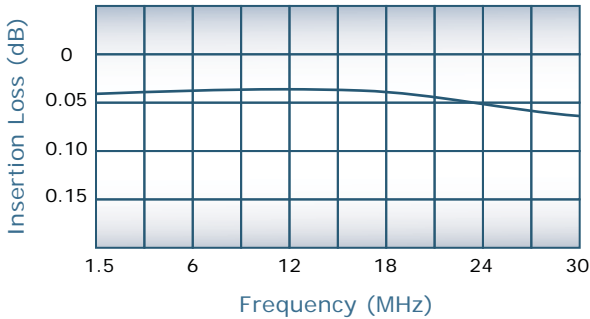

**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 3 Pounds
- Operating Temperature: -55°C to +75°C

**Connector Configurations**

Model	J1 (Sum Port)	J2,J3 (Input/Output)
D2076-10	N Female	N Female
D2076-12	N Female	SMA
D2076-13	N Female	BNC
D2076-102	SMA	SMA

