



**DECADES AHEAD<sup>®</sup>**  
high power RF devices

**Werlatone<sup>®</sup>, Inc.**





17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com



**4-Way Combiner/Divider**

**Model D2413**

Frequency:	50 - 200 MHz
Power:	4000 W CW
Insertion Loss:	0.4 dB Max.
VSWR:	1.30:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

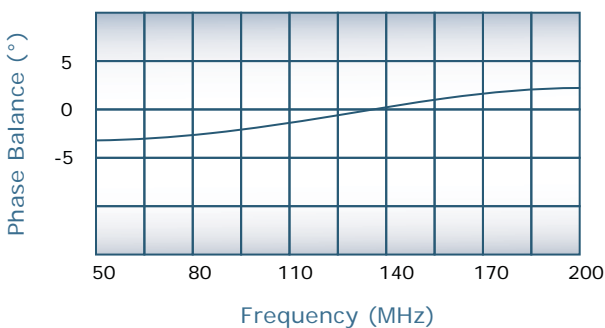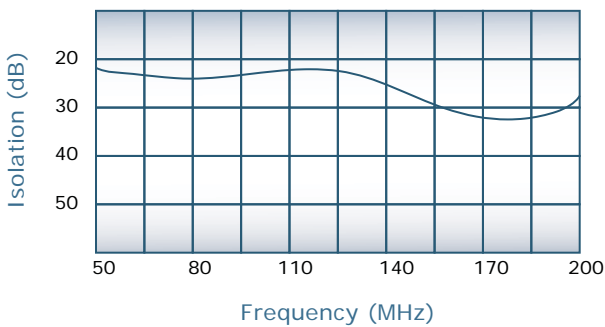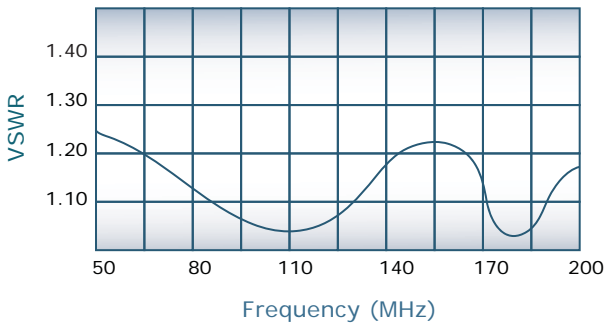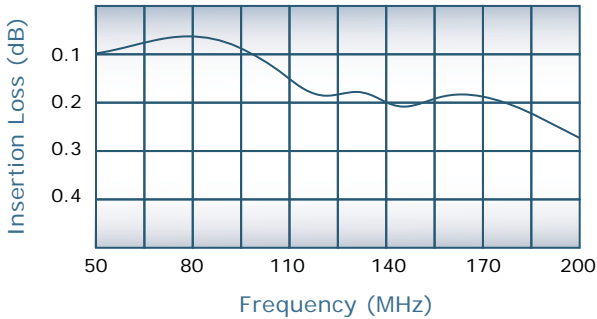

**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 28 pounds
- Fan Power: 1-3, 220V AC    2-1 & 3, 115 V AC or 220V AC (Based on customer specification)

**Connector Configurations**

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D2413-41	SC Female	N Female
D2413-70	7/8" EIA	N Female
D2413-80	1 5/8" EIA	N Female
D2413-392	LC Female	HN Female

