



**DECADES AHEAD<sup>®</sup>**  
high power RF devices

**Werlatone<sup>®</sup>, Inc.**





17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com



**4-Way Combiner/Divider**

**Model D2786**

Frequency:	20 - 150 MHz
Power:	4000 W CW
Insertion Loss:	0.5 dB Max.
VSWR:	1.35:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

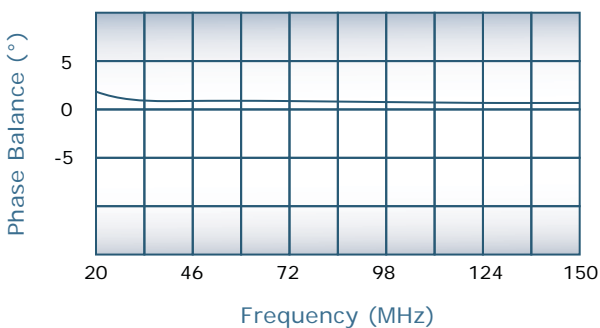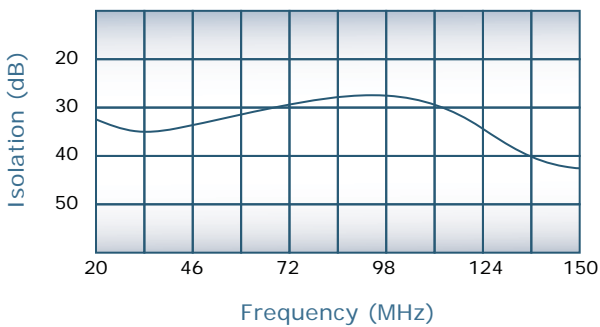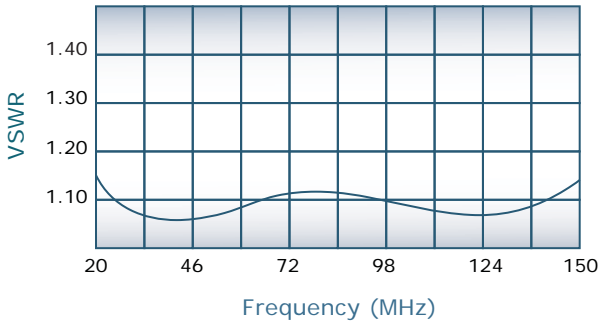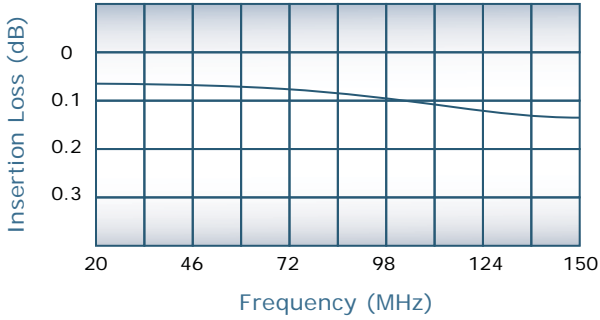

**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Fan Power: 1-3, 220V AC    2-1 & 3, 115V AC or 220V AC (based on customer specification).

**Connector Configurations**

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D2786-70	7/8" EIA	N Female
D2786-76	7/8" EIA	7/8" EIA
D2786-80	1 5/8" EIA	N Female
D2786-392	LC Female	HN Female

