



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



2-Way Combiner/Divider

Model D3030

Frequency:	200 - 400 MHz
Power:	500 W CW
Insertion Loss:	0.25 dB Max.
VSWR:	1.40:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 3° Max.
Amplitude Balance:	0.15 dB Max.

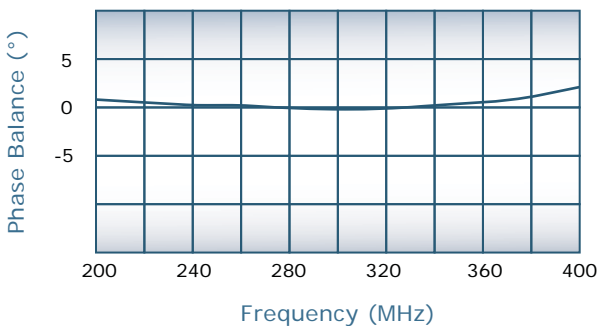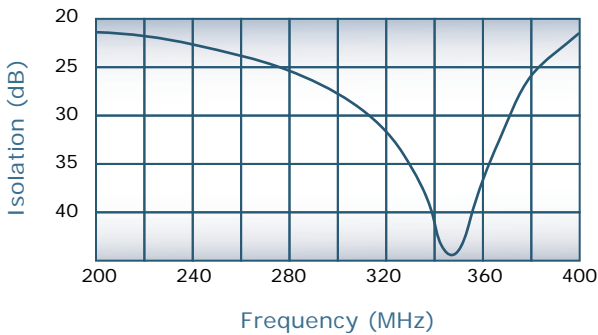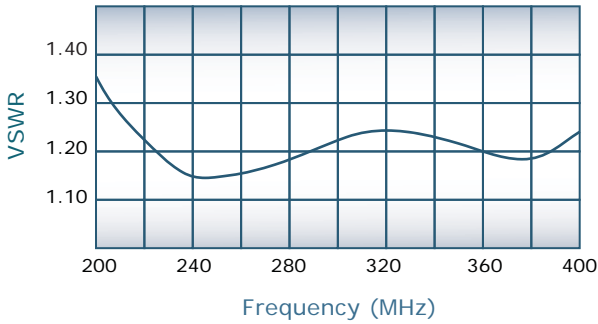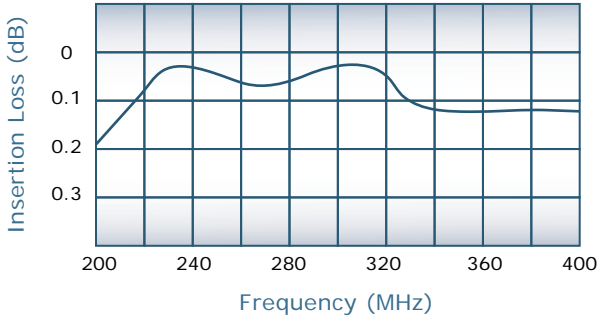

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 1.25 Pounds
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1 (Sum Port)	J2, J3 (Input/Output)
D3030-10	N Female	N Female
D3030-12	N Female	SMA
D3030-13	N Female	BNC
D3030-102	SMA	SMA

