

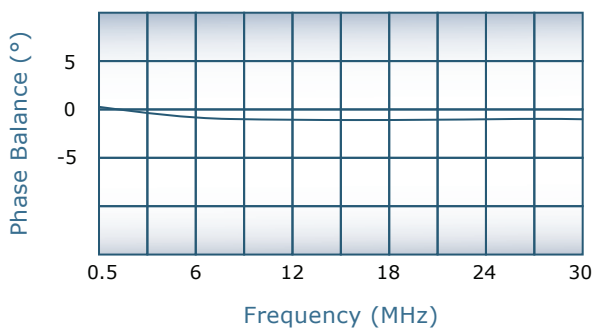
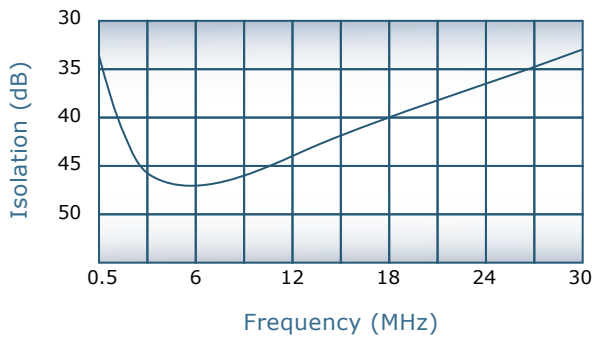


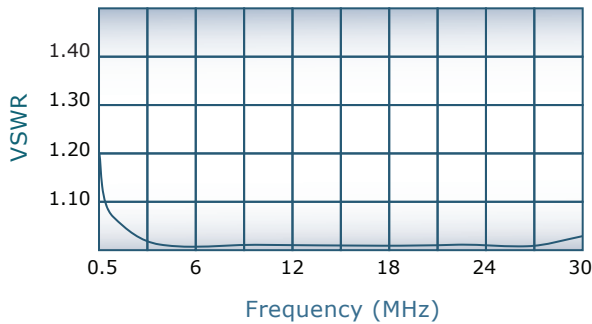

DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com

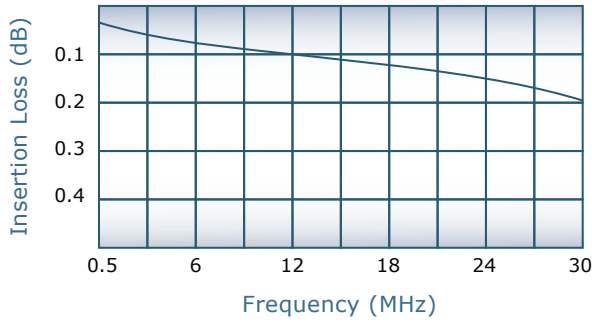

4-Way Combiner/Divider Model D3510

Frequency:	0.5 - 30 MHz
Power:	5 W CW
Insertion Loss:	0.5 dB Max.
VSWR:	1.30:1 Max.
Isolation:	30 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 0.5 pounds
- Operating Temperature: -55°C to +85°C

Connector Configurations

Model	J1 (Sum Port)	J2-J5 (Input/Output)
D3510-10	N Female	N Female
D3510-12	N Female	SMA
D3510-13	N Female	BNC
D3510-102	SMA	SMA

