




DECADES AHEAD[®]
high power RF devices



Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com



For In-Building Applications

**2-Way *Non-Isolated*
 Combiner/Divider**

Model D3806





Frequency:	80 - 1000 MHz
Power:	500 W CW
Insertion Loss:	0.5 dB Max.
VSWR:	1.50:1 Max.
Phase Balance:	± 6° Max.
Amplitude Balance:	0.2 dB Max.

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +85°C

Connector Configurations

Model	J1 (Sum Port)	J2,J3 (Input/Output)
D3806-10	N Female	N Female
D3806-12	N Female	SMA
D3806-28	7/16 Female	7/16 Female

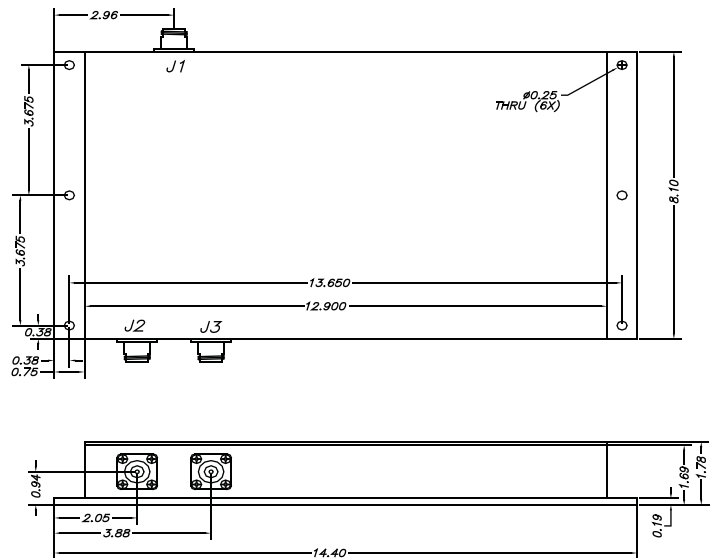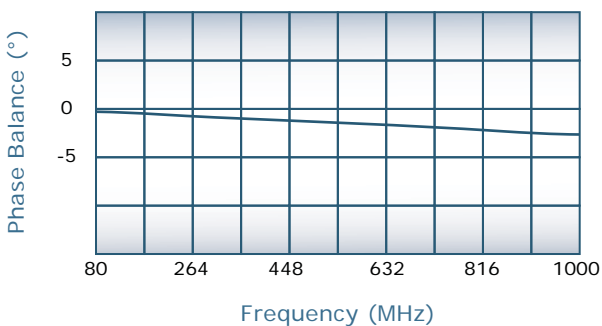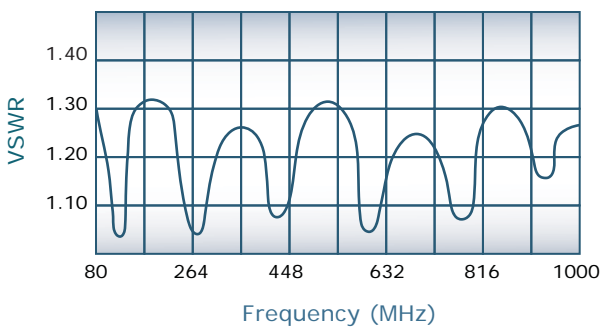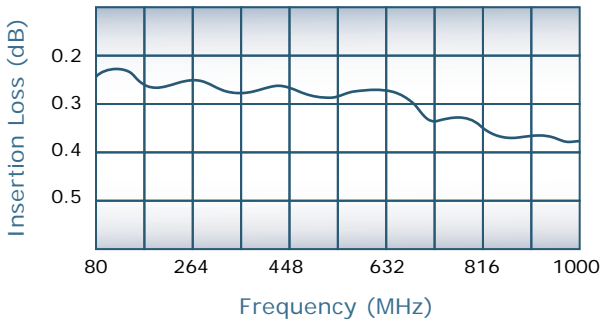

Specifications subject to change without notice



Send Us Your Specs for Custom Designs