



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com



4-Way Combiner/Divider

Model D3857

Frequency:	10 - 100 MHz
Power:	5000 W CW
Insertion Loss:	0.6 dB Max.
VSWR:	1.40:1 Max.
Isolation:	18 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

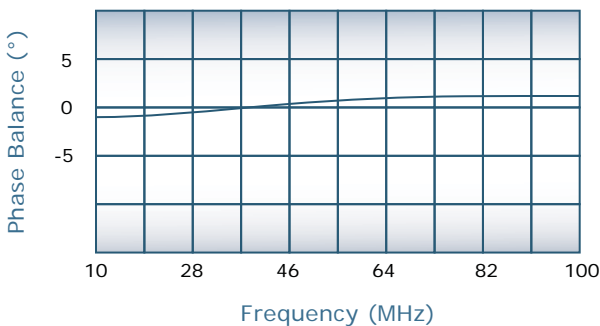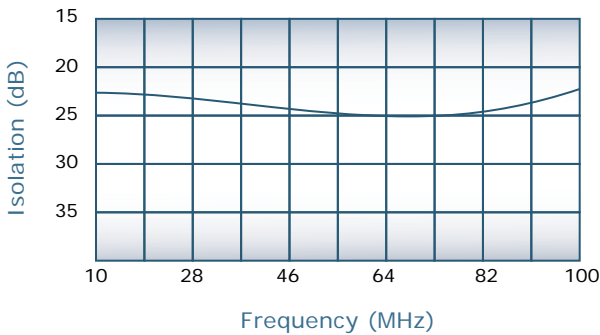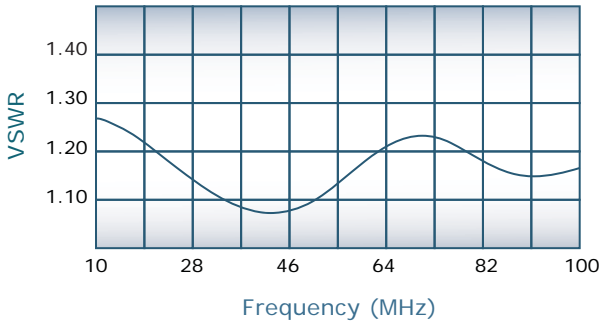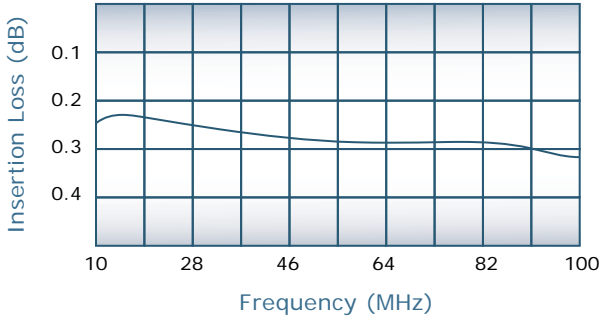

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Fan Power: 1-3, 220V AC 2-1 & 3, 115V AC
- Operating Temperature: -55°C to +85°C

Connector Configurations

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D3857-80	1 5/8" EIA	N Female
D3857-392	LC Female	HN Female

