




DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



4-Way Combiner/Divider

Model D5300

Frequency:	100 - 500 MHz
Power:	1200 W CW
Insertion Loss:	0.5 dB Max.
VSWR:	1.40:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.25 dB Max.

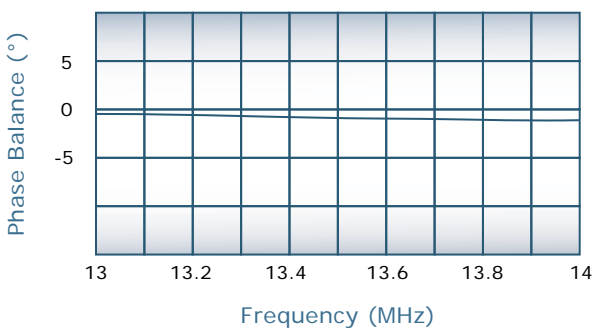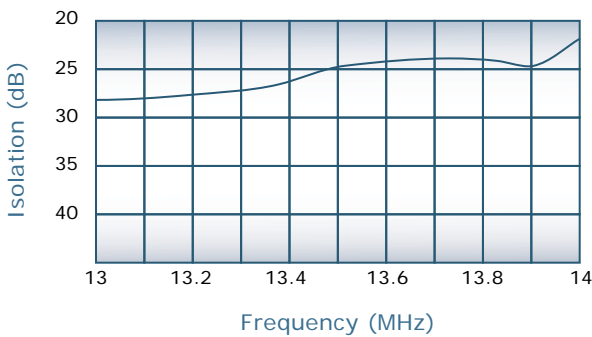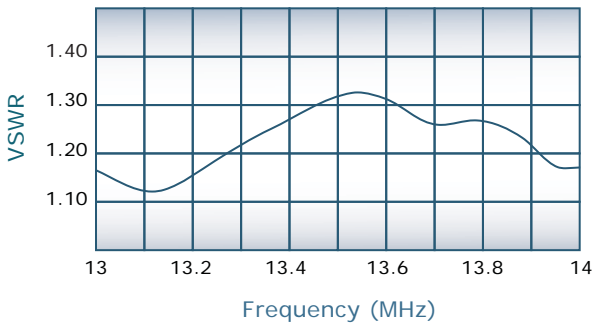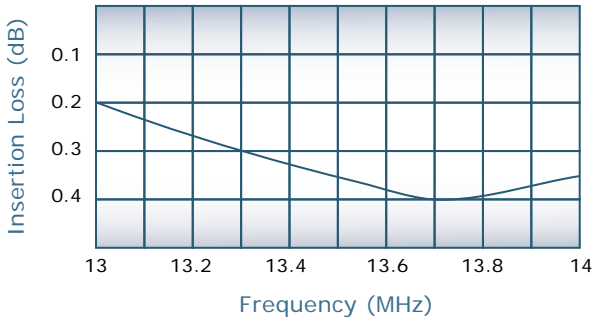

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 4.75 pounds
- Operating Temperature: -55°C to +85°C

Connector Configurations

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D5300-10	N Female	N Female
D5300-12	N Female	SMA
D5300-20	7/16 Female	N Female
D5300-41	SC Female	N Female

