



**DECADES AHEAD<sup>®</sup>**  
**high power RF devices**





**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
 T (845) 278 2220      www.werlatone.com  
 F (845) 278 3440      sales@werlatone.com

**2-Way Combiner/Divider**

**Model D5349**

Frequency:	1200 - 1400 MHz
Power:	500 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.30:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.15 dB Max.

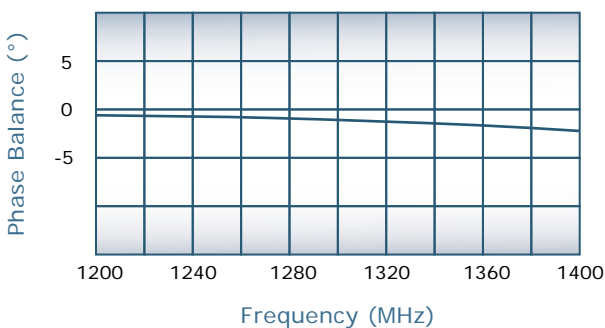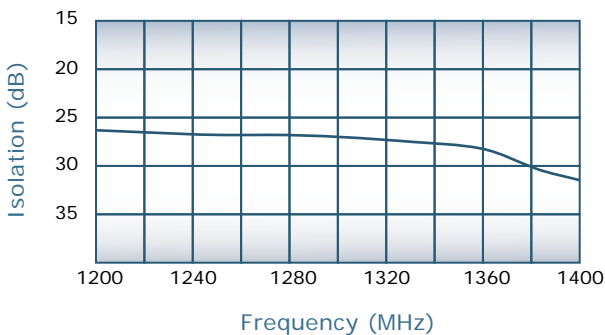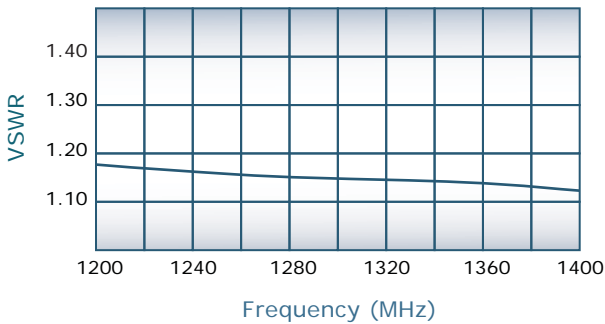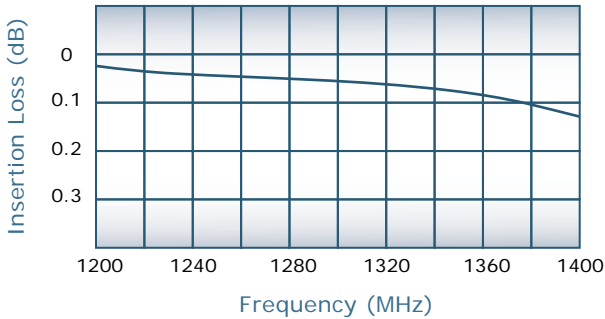

**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 0.75 Pounds
- Unit will handle a full input failure at rated power
- Operating Temperature: -55°C to +75°C

**Connector Configurations**

Model	J1 (Sum Port)	J2, J3 (Input/Output)
D5349-10	N Female	N Female
D5349-12	N Female	SMA
D5349-13	N Female	BNC
D5349-41	SC Female	N Female

