



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com



4-Way Combiner/Divider

Model D5387

| | |
|--------------------|-------------|
| Frequency: | 1 - 50 MHz |
| Power: | 1000 W CW |
| Insertion Loss: | 0.3 dB Max. |
| VSWR: | 1.30:1 Max. |
| Isolation: | 20 dB Min. |
| Phase Balance: | ± 5° Max. |
| Amplitude Balance: | 0.1 dB Max. |

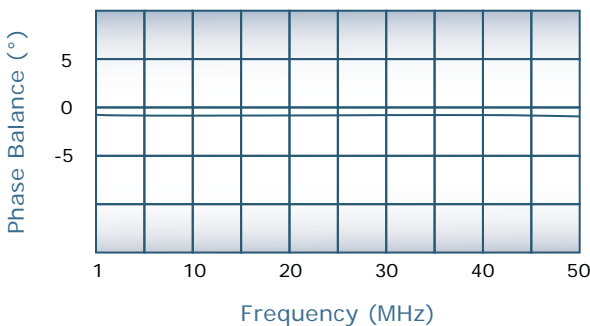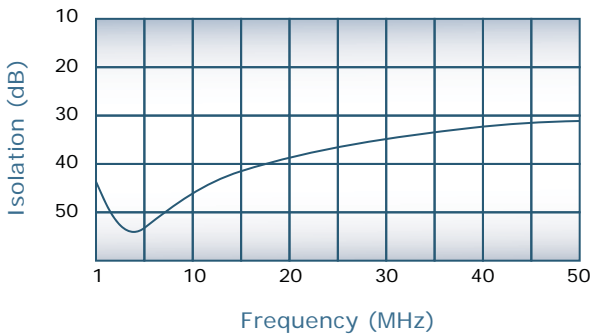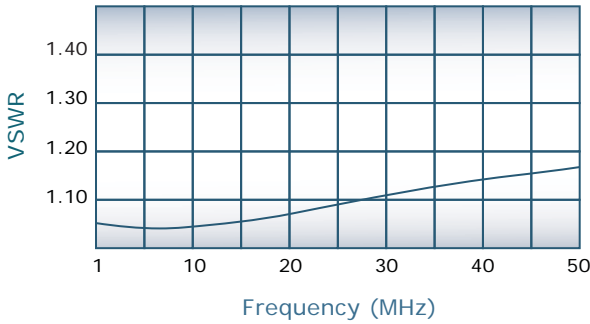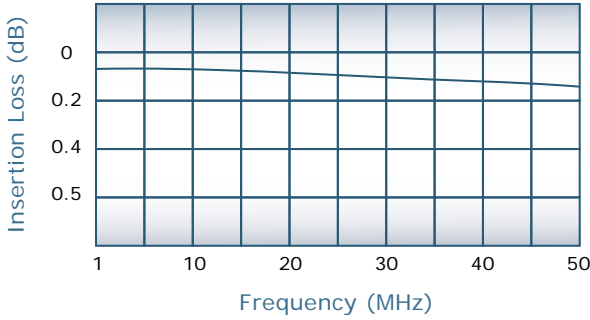

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 8 pounds, 9 ounces
- Operating Temperature: -55°C to +85°C

Connector Configurations

| Model | J5 (Sum Port) | J1-J4 (Input/Output) |
|----------|---------------|----------------------|
| D5387-10 | N Female | N Female |
| D5387-12 | N Female | SMA |
| D5387-20 | 7/16 Female | N Female |
| D5387-41 | SC Female | N Female |

