



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com



4-Way Combiner/Divider

Model D5491

Frequency:	18 - 115 MHz
Power:	7000 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.25:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.1 dB Max.

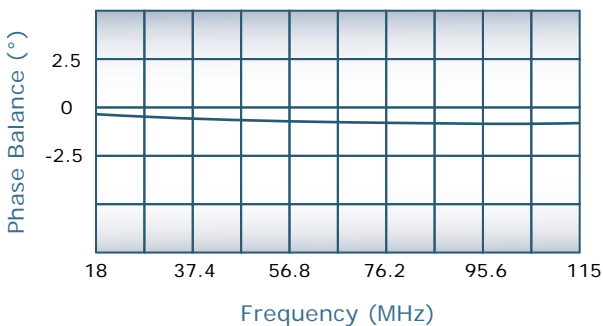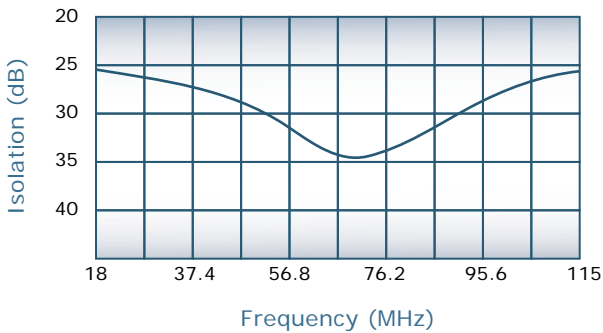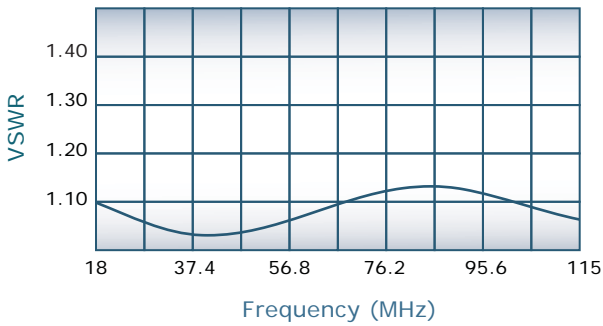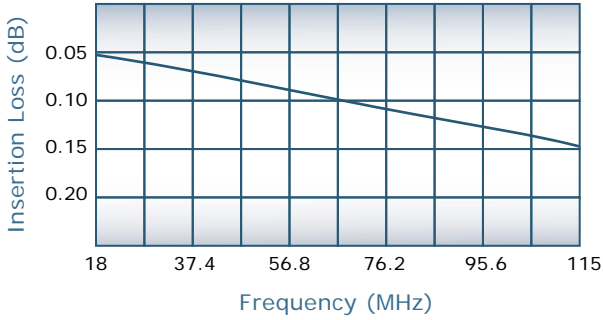

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 25 pounds
- Operating Temperature: -55°C to +85°C

Connector Configurations

Model	J5 (Sum Port)	J1-J4 (Input/Output)	J6 (Sensor Port)
D5491-38	LC Female	7/16 Female	SMA
D5491-390	LC Female	SC Female	SMA

