



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com






3-Way *Non-Isolated* Combiner/Divider

Model D5543

Frequency:	400 - 470 MHz
Power:	100 W CW
Insertion Loss:	0.2 dB Max.
VSWR:	1.20:1 Max.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.3 dB Max.



For In-Building Applications

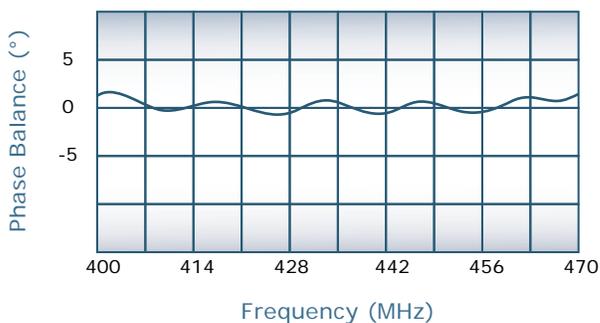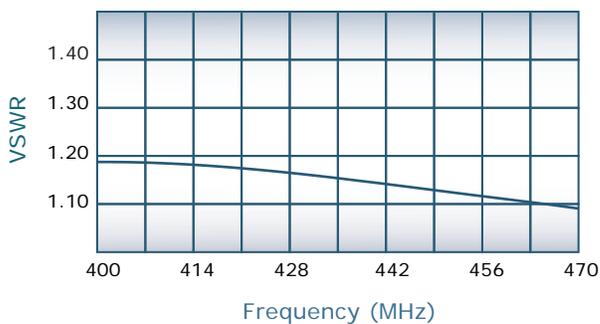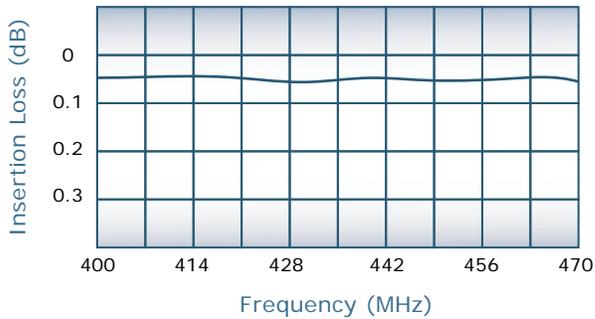

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 12 Ounces
- Operating Temperature: -55°C to +85°C

Connector Configurations

Model	J4 (Sum Port)	J1-J3 (Input/Output)
D5543-10	N Female	N Female
D5543-12	N Female	SMA
D5543-102	SMA	SMA

