



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com



4-Way Combiner/Divider

Model D5704

Frequency: 0.1 - 30 MHz

Power: 1000 W CW
 100 W / Input Non-Coherent





Insertion Loss: 0.4 dB Max.

VSWR: 1.30:1 Max.

Isolation: 20 dB Min.

Phase Balance: $\pm 5^\circ$ Max.

Amplitude Balance: 0.2 dB Max.

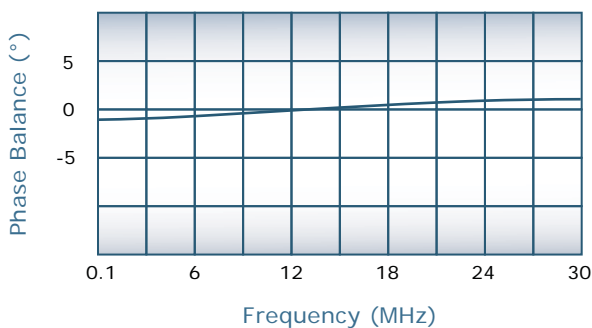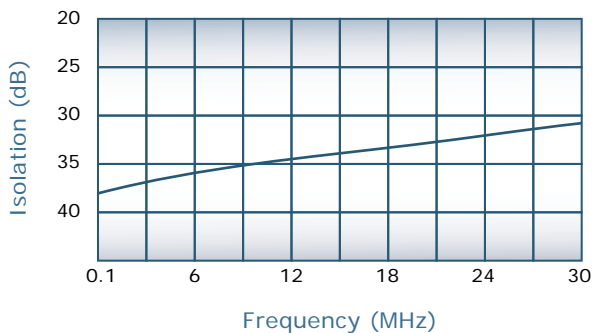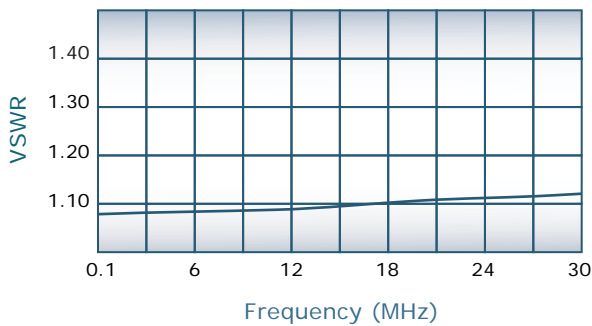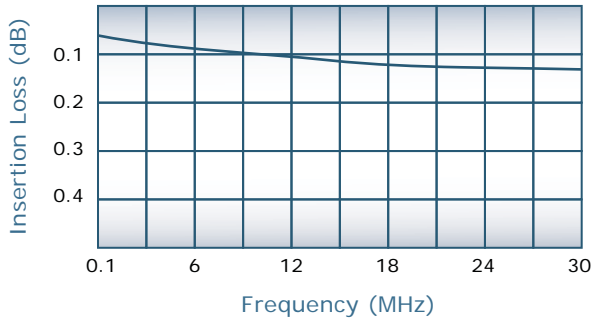

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +85°C

Connector Configurations

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D5704-10	N Female	N Female
D5704-12	N Female	SMA
D5704-13	N Female	BNC
D5704-20	7/16 Female	N Female

