



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com






4-Way *Non-Isolated* Combiner/Divider

Model D5875

Frequency:	80 - 1000 MHz
Power:	150 W CW
Insertion Loss:	0.8 dB Max.
VSWR:	1.30:1 Max.
Phase Balance:	$\pm 5^\circ$ Max.
Amplitude Balance:	0.25 dB Max.



For In-Building Applications

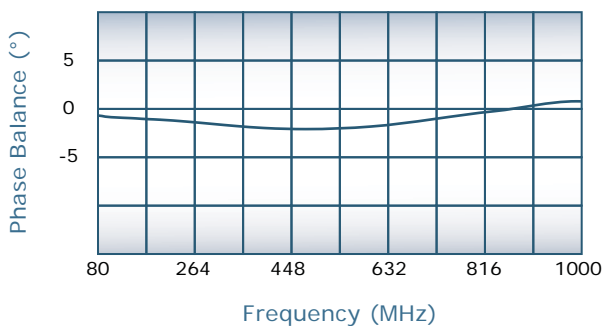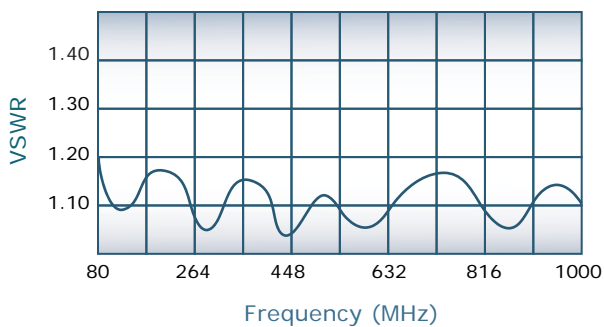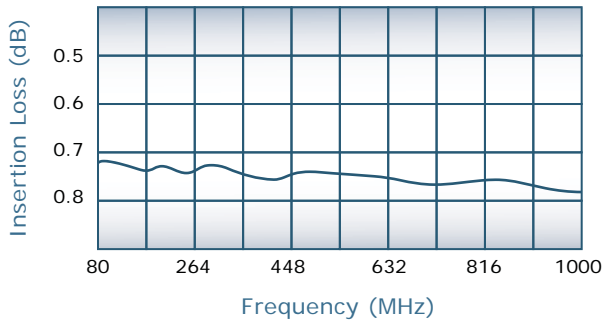

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +85°C

Connector Configurations

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D5875-10	N Female	N Female
D5875-12	N Female	SMA
D5875-102	SMA	SMA

