






**DECADES AHEAD<sup>®</sup>**  
**high power RF devices**

**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
 T (845) 278 2220      www.werlatone.com  
 F (845) 278 3440      sales@werlatone.com



**For In-Building Applications**

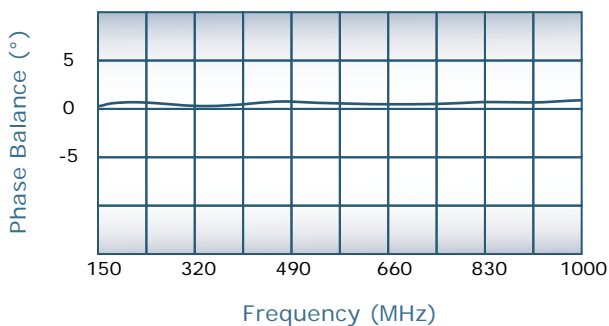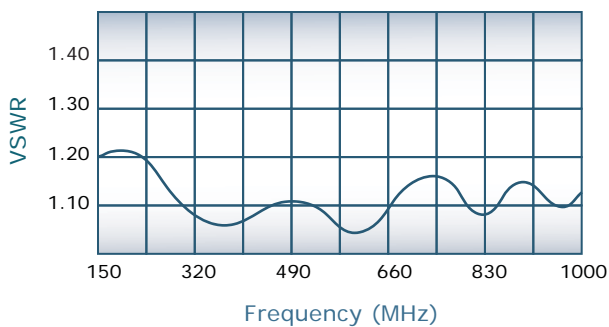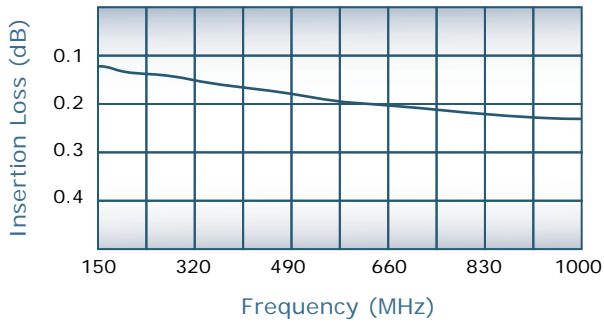

**2-Way *Non-Isolated* Combiner/Divider**

**Model D5877**

Frequency:	150 - 1000 MHz
Power:	350 W CW
Insertion Loss:	0.5 dB Max.
VSWR:	1.30:1 Max.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.25 dB Max.

**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 5 Pounds 4 Ounces
- Operating Temperature: -55°C to +85°C

**Connector Configurations**

Model	J1 (Sum Port)	J2,J3 (Input/Output)
D5877-10	N Female	N Female
D5877-20	7/16 Female	N Female

