



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com



2-Way Combiner/Divider

Model D6037

| | |
|--------------------|--------------|
| Frequency: | 10 - 140 MHz |
| Power: | 400 W CW |
| Insertion Loss: | 0.3 dB Max. |
| VSWR: | 1.35:1 Max. |
| Isolation: | 20 dB Min. |
| Phase Balance: | ± 5° Max. |
| Amplitude Balance: | 0.15 dB Max. |

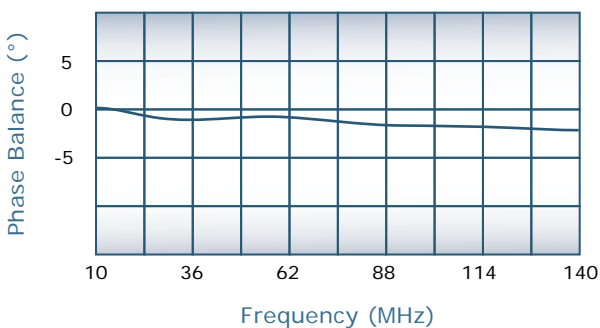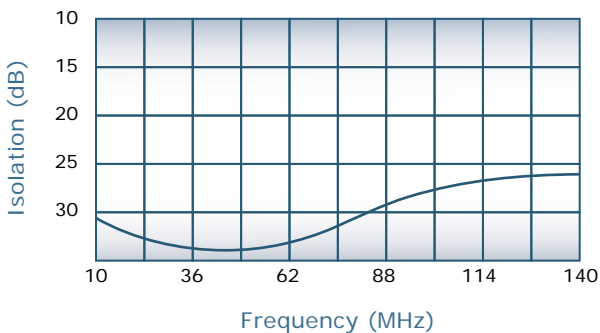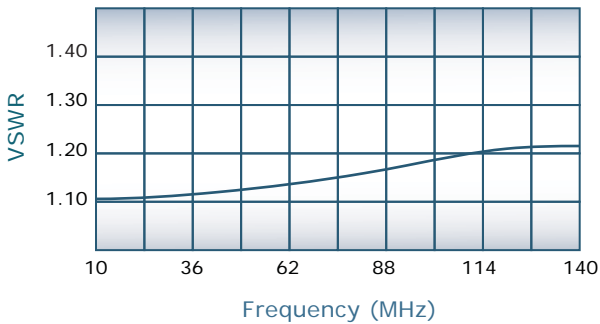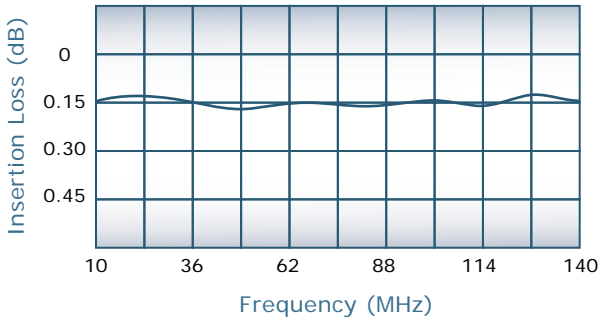

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +75°C

Connector Configurations

| Model | J1 (Sum Port) | J2, J3 (Input/Output) |
|-----------|---------------|-----------------------|
| D6037-10 | N Female | N Female |
| D6037-12 | N Female | SMA |
| D6037-13 | N Female | BNC |
| D6037-102 | SMA | SMA |

