




**DECADES AHEAD<sup>®</sup>**  
high power RF devices

**Werlatone<sup>®</sup>, Inc.**





17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com



## 2-Way Combiner/Divider

### Model D6078

Frequency:	100 - 500 MHz
Power:	2,000 W CW
Insertion Loss:	0.25 dB Max.
VSWR:	1.20:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.15 dB Max.

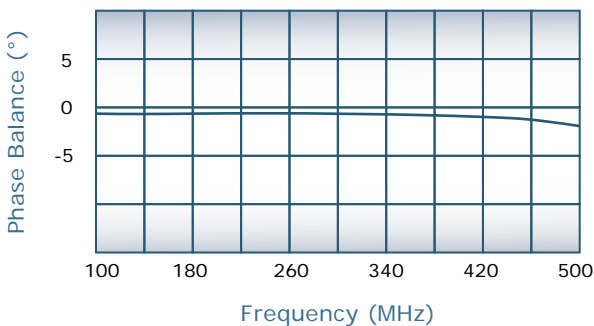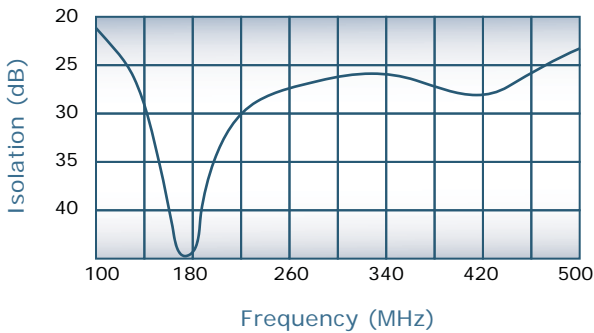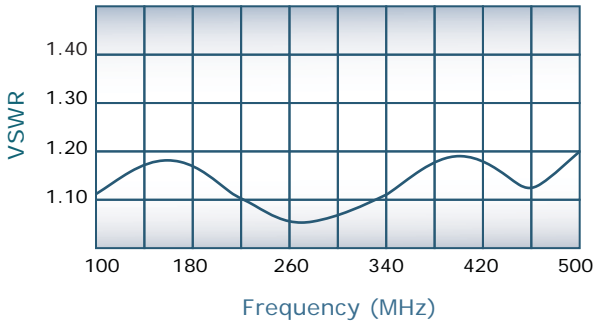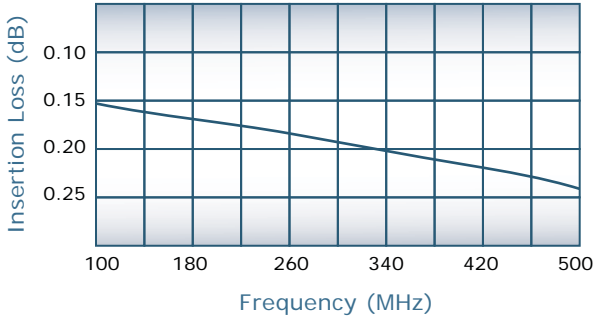

**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 4 Pounds
- Operating Temperature: -55°C to +75°C

**Connector Configurations**

Model	J3 (Sum Port)	J1,J2 (Input/Output)
D6078-20	7/16 Female	N Female
D6078-40	SC Female	SC Female
D6078-41	SC Female	N Female

