



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com



2-Way Combiner/Divider

Model D6103

Frequency:	0.1 - 20 MHz
Power:	400 W CW 4 kW Peak
Insertion Loss:	0.2 dB Max.
VSWR:	1.20:1 Max.
Isolation:	20 dB Min.
Phase Balance:	$\pm 5^\circ$ Max.
Amplitude Balance:	0.1 dB Max.

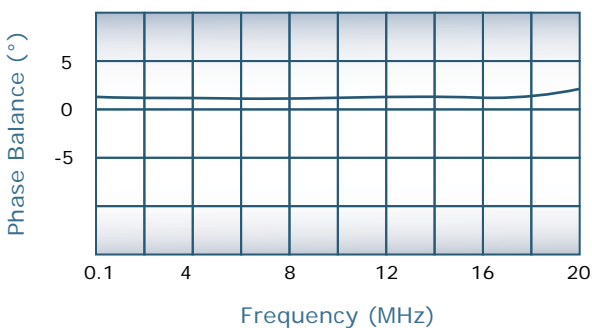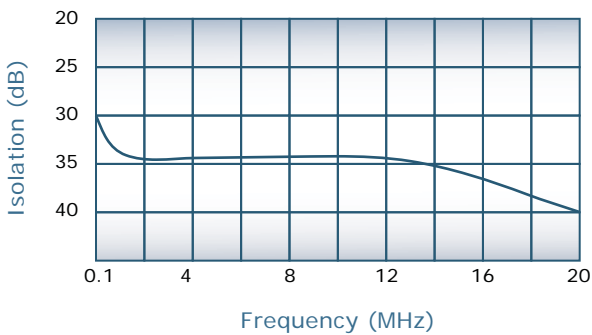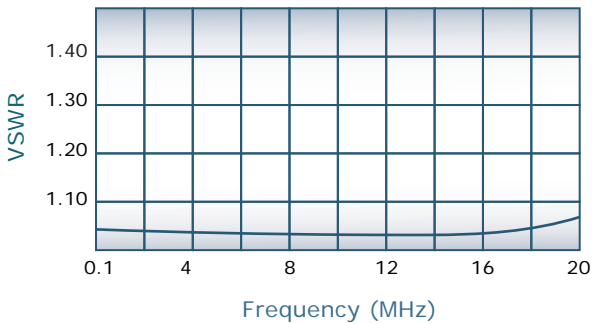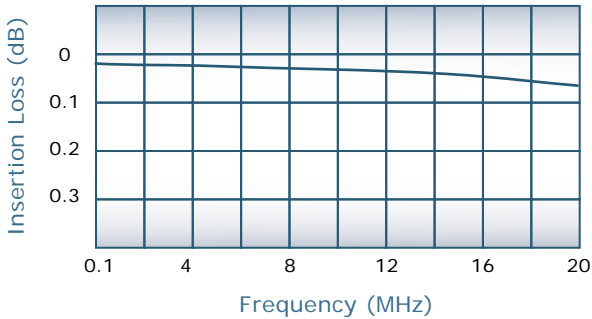

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 3 Pounds 5 Ounces
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1 (Sum Port)	J2, J3 (Input/Output)
D6103-10	N Female	N Female
D6103-12	N Female	SMA
D6103-13	N Female	BNC

