



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



4-Way Combiner/Divider

Model D6183

Frequency:	1 - 1000 MHz
Power:	250 W CW
Insertion Loss:	1.2 dB Max.
VSWR:	1.45:1 Max.
Isolation:	18 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.6 dB Max.

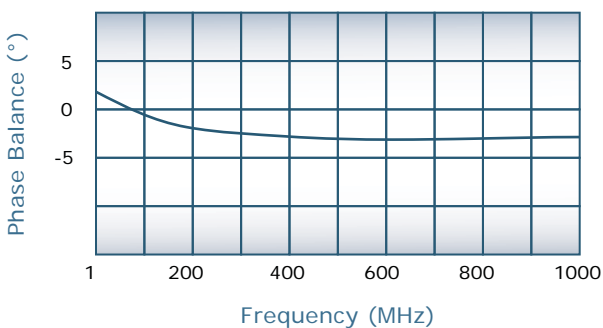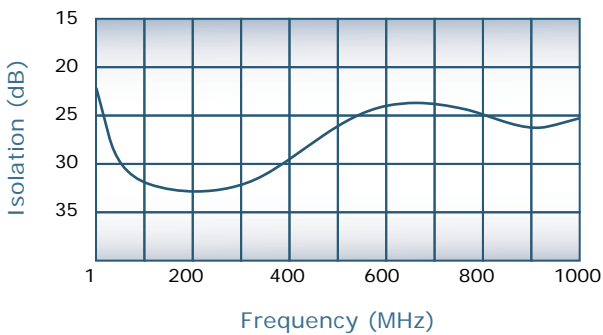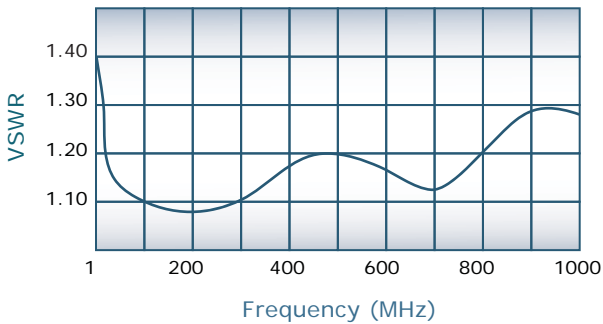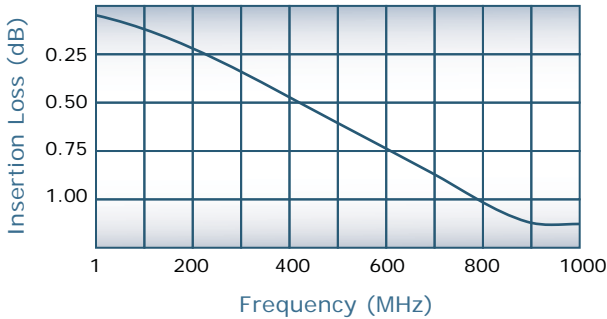

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate Connector Configurations Upon Request
- Weight: 6 Pounds 4 Ounces
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J5 (Sum Port)	J1-J4 (Input/Output)
D6183-10	N Female	N Female
D6183-12	N Female	SMA
D6183-13	N Female	BNC
D6183-102	SMA	SMA

