






DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com

**16-Way *Non-Isolated*
 Combiner/Divider**

Model D6309

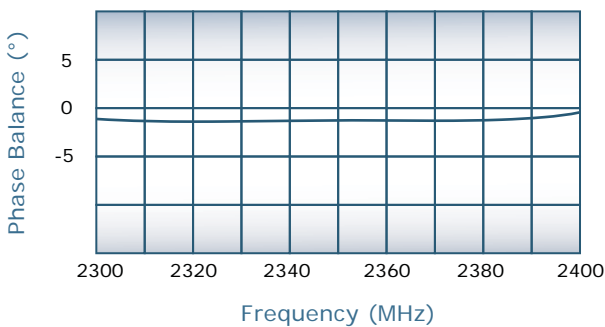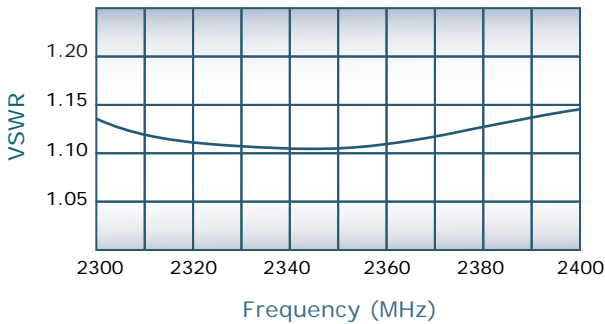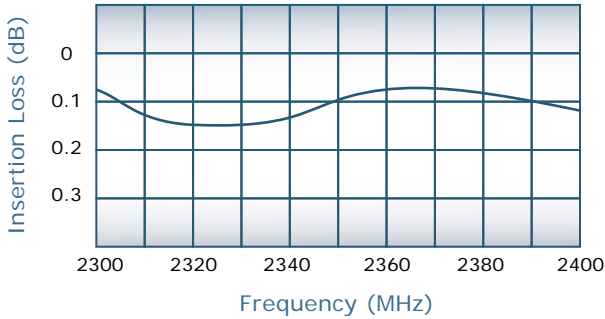


Frequency:	2300 - 2400 MHz
Power:	2,000 W CW
Insertion Loss:	0.2 dB Max.
VSWR:	1.15:1 Max.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +85°C

Connector Configurations

Model	J17 (Sum Port)	J1-J16 (Input/Output)
D6309-72	7/8" EIA	SMA

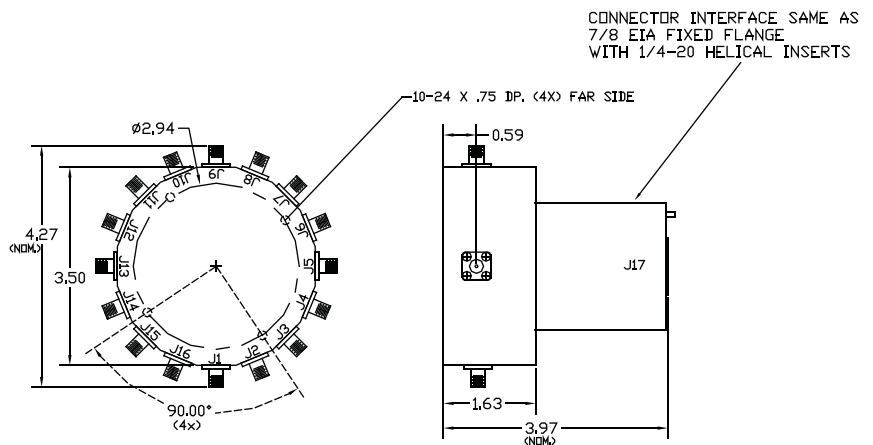

SINCE 1965

Specifications subject to change without notice



Send Us Your Specs for Custom Designs