



**DECADES AHEAD<sup>®</sup>**  
high power RF devices

**Werlatone<sup>®</sup>, Inc.**





17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com



**4-Way Combiner/Divider**

**Model D6530**

Frequency:	10 - 500 MHz
Power:	100 W CW
Insertion Loss:	0.6 dB Max.
VSWR:	1.25:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

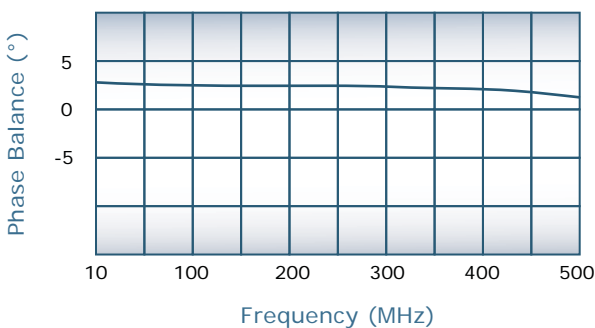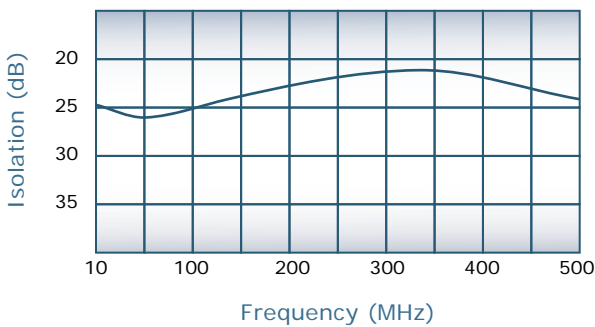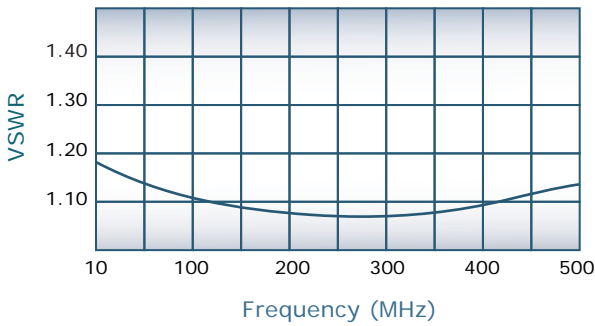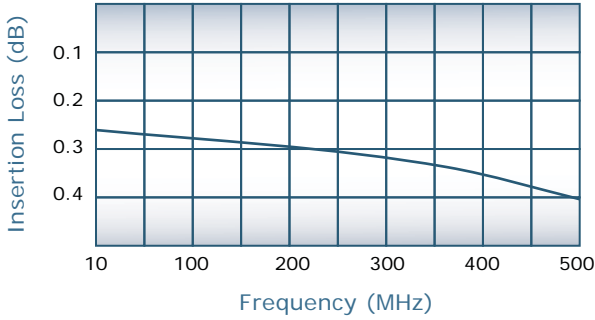

**Notes**

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate Connector Configurations Upon Request
- Weight: 1 Pound
- Operating Temperature: -55°C to +75°C
- For N Connector Version, See Model D8089

**Connector Configurations**

Model	J1 (Sum Port)	J2-J5 (Input/Output)
D6530-102	SMA	SMA

