



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



4-Way Combiner/Divider

Model D6738

| | |
|--------------------|---------------|
| Frequency: | 100 - 500 MHz |
| Power: | 50 W CW |
| Insertion Loss: | 0.65 dB Max. |
| VSWR: | 1.30:1 Max. |
| Isolation: | 20 dB Min. |
| Phase Balance: | ± 5° Max. |
| Amplitude Balance: | 0.25 dB Max. |

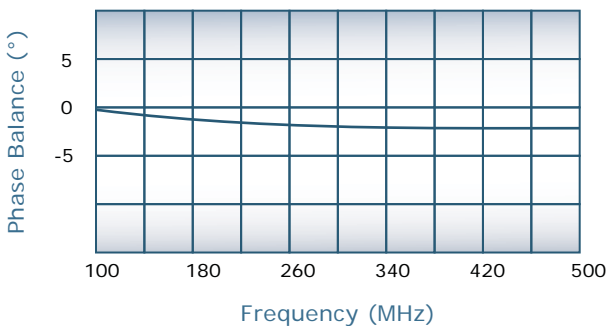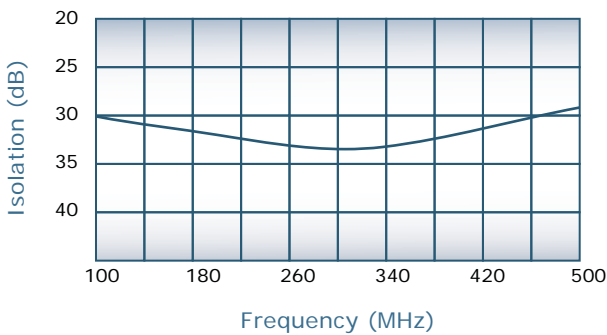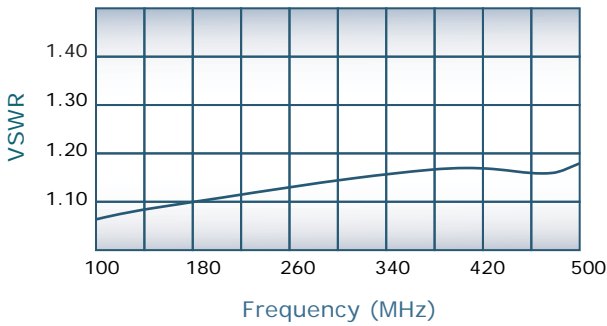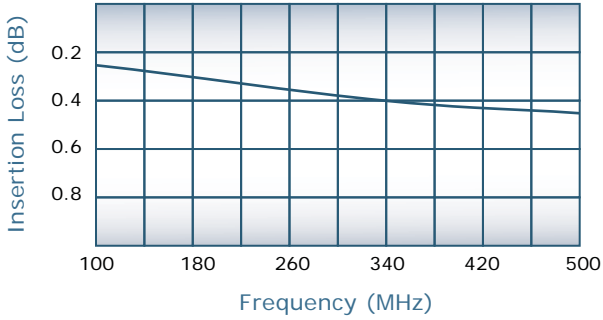

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate Connector Configurations Upon Request
- Weight: 1.5 Pounds
- Operating Temperature: -55°C to +75°C

Connector Configurations

| Model | J1 (Sum Port) | J2-J5 (Input/Output) |
|-----------|---------------|----------------------|
| D6738-102 | SMA | SMA |

