



**DECADES AHEAD<sup>®</sup>**  
high power RF devices

**Werlatone<sup>®</sup>, Inc.**

17 Jon Barrett Road Patterson, New York 12563  
T (845) 278 2220      www.werlatone.com  
F (845) 278 3440      sales@werlatone.com



## 4-Way Combiner/Divider

### Model D6774

Frequency: 1.5 - 32 MHz

Power: 20,000 W CW





Insertion Loss: 0.3 dB Max.

VSWR: 1.20:1 Max.

Isolation: 20 dB Min.

Phase Balance:  $\pm 5^\circ$  Max.

Amplitude Balance: 0.15 dB Max.

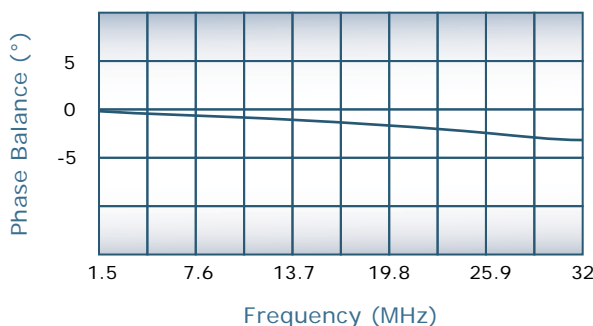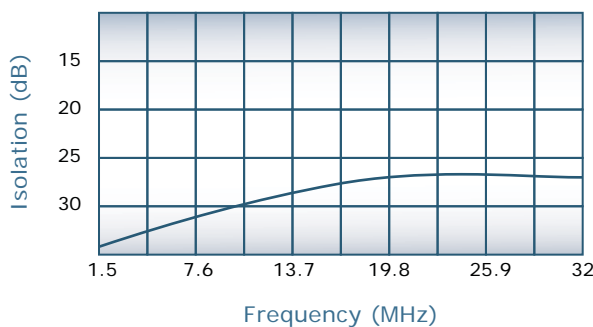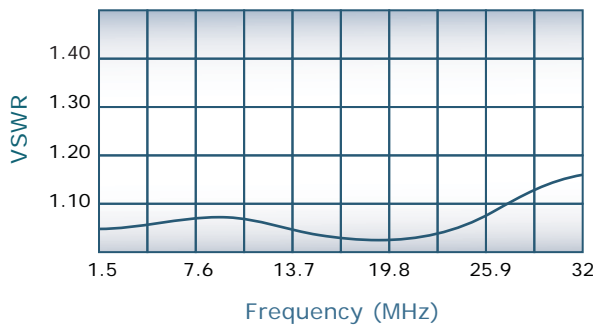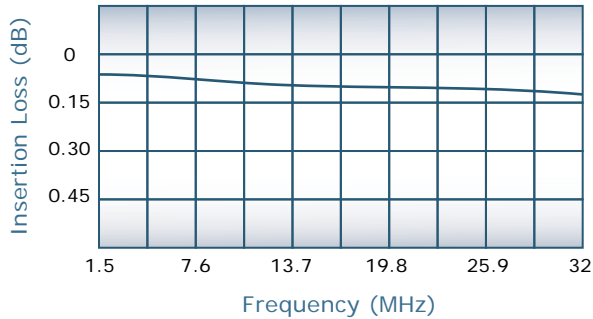

### Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate Connector Configurations Upon Request
- Weight: 113 Pounds
- Operating Temperature:  $-55^\circ\text{C}$  to  $+75^\circ\text{C}$
- Supplied with 110V AC Fans

### Connector Configurations

Model	J5 (Sum Port)	J1-J4 (Input/Output)	J6-J10 (Loads)
D6774-88	1 5/8" EIA	LC Female	SC Female

